



## PU-507-KIT

5-Play HDBaseT™ Extender Kit (inc. PoE & single LAN, up to 100m)

**OPERATIONS MANUAL**



## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2011 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1 August 2011

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

---



## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
VS1	29/02/12	First Release
VR2	02/03/12	PoE Support (Brand only)
VS3	23/03/12	Amended PoE function Updated the connection diagram and the specifications table
v1.01	20/09/13	Amended Link LED description
v1.02	08/10/13	Amended product description

# CONTENTS

<b>1. Introduction .....</b>	<b>6</b>
<b>2. Applications .....</b>	<b>6</b>
<b>3. Package Contents .....</b>	<b>6</b>
<b>4. System Requirements .....</b>	<b>6</b>
<b>5. Features.....</b>	<b>7</b>
<b>6. Operation Controls and Functions .....</b>	<b>8</b>
6.1 Transmitter Front and Rear Panels.....	8
6.2 Receiver Front and Rear Panels .....	9
6.3. D-Sub 9 Pin Definitions .....	10
<b>7. Connection Diagram .....</b>	<b>11</b>
<b>8. Specifications.....</b>	<b>12</b>
<b>9. Acronyms.....</b>	<b>13</b>

---

## **1. INTRODUCTION**

The PU-507-KIT allows uncompressed HDMI signals and IP data to be transmitted over a Single CAT5e/6 cable. This solution has the added features of RS-232 and 2-way IR control functionality over the same CAT5e/6 cable. These combined HDMI and control signals can be transmitted up to lengths of 100 metres.

## **2. APPLICATIONS**

- ///** Household entertainment sharing and control
- ///** Lecture room display and control
- ///** Showroom display and control
- ///** Meeting room presentation and control
- ///** Classroom display and control

## **3. PACKAGE CONTENTS**

- ///** 1×HDMI to CAT5e/6 (with LAN/IR/RS-232) Transmitter
- ///** 1×CAT5e/6 to HDMI (with LAN/IR/RS-232) Receiver
- ///** 1×IR Blaster
- ///** 1×IR Receiver
- ///** 1×24V/1.25 A DC Power Adaptor
- ///** Operation Manual

## **4. SYSTEM REQUIREMENTS**

Input HDMI source equipment such as DVD/Blu-ray player and HDMI equipped output display (TV or monitor).

## 5. FEATURES


- /// v1.4 HDMI with 3D, 4k - 2k support.
- /// HDCP & DVI compliant.
- /// Supports HDCP repeating and CEC functions.
- /// Uncompressed data transfer over single CAT cable (100m - CAT6; 80m - CAT5e).
- /// Uncompressed video 1080p, 60Hz, 48bits
- /// Audio support up to 7.1CH & Dolby TrueHD, DTS-HD.
- /// 5Play™ convergence: HDMI, LAN, POE & Control (IR & RS232).
- /// Supports 3D signals.

Note:

1. *This system was tested with CAT-6E/23AWG cables, results may vary with cables of a different specification.*
2. *The PoE function is designed for powering compatible receiver units only—non-PoE receivers will need their own power supply. Receivers of another brand may not be compatible.*

## 6. OPERATION CONTROLS AND FUNCTIONS


### 6.1 Transmitter Front and Rear Panels

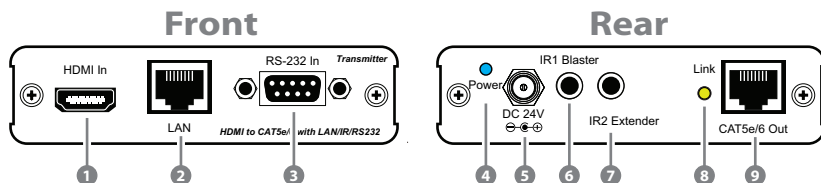

- 1 **HDMI In:** Connect to HDMI source equipment such as a DVD or Blu-ray player.
- 2 **LAN:** Connect to an internet or network connection.
- 3 **RS-232 In:** Connect to a PC or laptop with D-Sub 9 pin male cable for the transmission of RS-232 commands.
- 4 **Power LED:** This blue LED will illuminate when the device is connected to a power supply.
- 5 **DC 24V:** Plug the 24V DC power supply into the unit and connect the adaptor to an AC outlet.
- 6 **IR 1 Blaster:** Connect to the supplied IR blaster cable for IR signal transmission. Place the IR blaster in direct line-of-sight of the equipment to be controlled.
- 7 **IR 2 Extender:** Connect to the supplied IR receiver cables for IR signal reception. Ensure that remote being used is within the direct line-of-sight of the IR extender.
- 8 **Link LED:** The yellow LED will illuminate when both the input and output signals are connected through the CAT cable. When it blinks regularly it indicates the source is NOT sending a signal to the transmitter but the transmitter and receiver are linked. If it blinks irregularly it indicates an error has occurred.
- 9 **CAT5e/6 Out:** Connect to the receiver unit with a Single CAT5e/6 cable for transmission of all data signals.



## 6.2 Receiver Front and Rear Panels

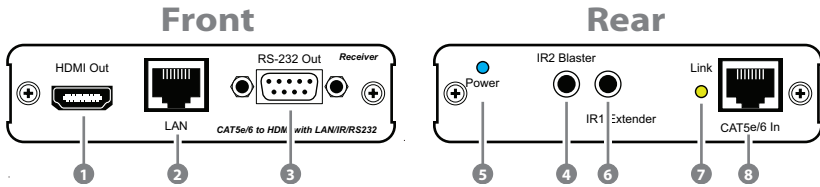


- 1 **HDMI Out:** Connect to a HDMI equipped TV/monitor for display of the HDMI input source signal.
- 2 **LAN:** Connect to a PC or Laptop to the Internet or network connection.
- 3 **RS-232 Out:** Connect to the device that is to be controlled (via D-Sub 9 pin female cable) by RS-232 commands.
- 4 **Power LED:** This blue LED will illuminate when the device is connected to a power supply.
- 5 **IR 2 Blaster:** Connect to the supplied IR blaster cable for IR signal transmission. Place the IR blaster in direct line of sight of the equipment to be controlled.
- 6 **IR 1 Extender:** Connect to the supplied IR receiver cables for IR signal reception. Ensure that remote being used is within the direct line-of-sight of the IR extender.
- 7 **Link LED:** The yellow LED will illuminate when both the input and output signals are connected through the CAT cable. When it blinks regularly it indicates the source is NOT sending a signal to the transmitter but the transmitter and receiver are linked. If it blinks irregularly it indicates an error has occurred.
- 8 **CAT5e/6 In:** Connect to the transmitter unit with a Single CAT5e/6 cable for transmission of all data signals.

### 6.3. D-Sub 9 Pin Definitions

Pin	Define TX / RX
1	N/C
2	TxD / RxD
3	RxD / TxD
4	N/C
5	GND
6	N/C
7	N/C
8	N/C
9	N/C

# 7. CONNECTION DIAGRAM

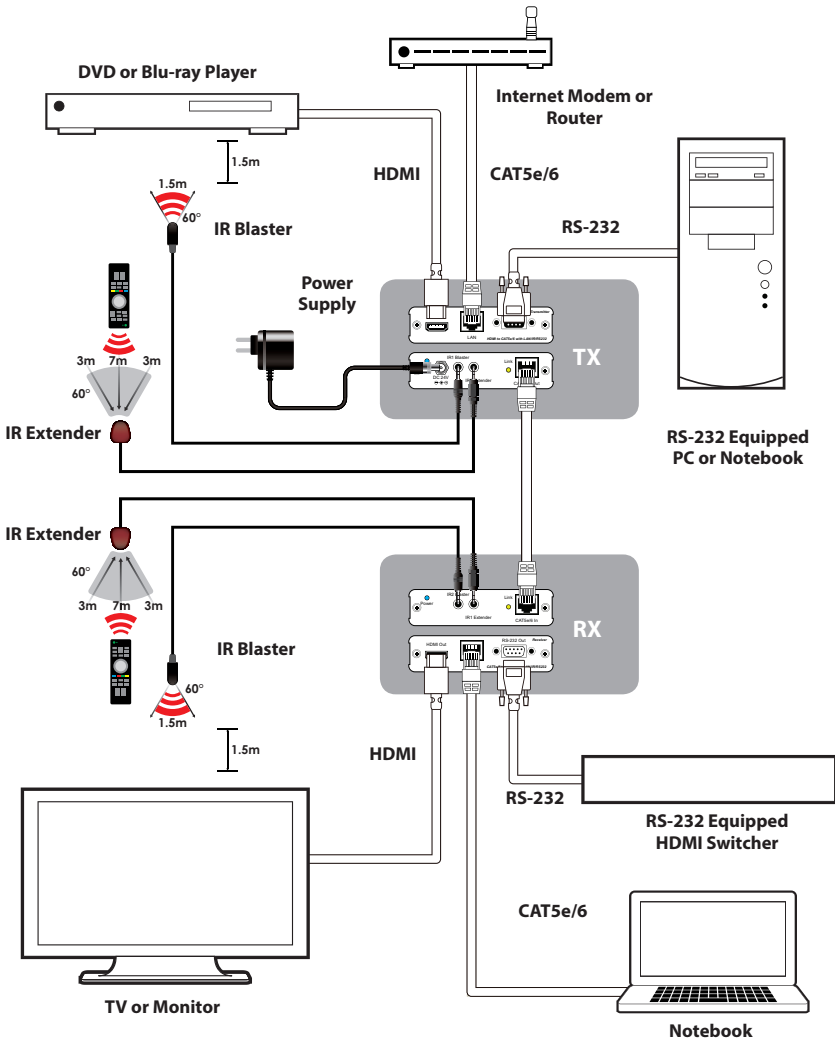

## 8. SPECIFICATIONS

<b>Video Bandwidth</b>	300 MHz/9 Gbps
<b>Ethernet Speed</b>	100 Mbps
<b>Transmitter</b>	
<b>Input</b>	1×HDMI, 1×IR Extender, 1×RS-232, 1×LAN
<b>Output</b>	1×CAT5e/6, 1×IR Blaster
<b>Receiver</b>	
<b>Input</b>	1×CAT5e/6, 1×IR Extender
<b>Output</b>	1×HDMI, 1×RS-232, 1× IR Blaster, 1× LAN
<b>HDMI In/Out Cable Distance</b>	Up to 10 Meters
<b>CAT6 In/Out Cable Distance</b>	Up to 100 Meters
<b>HDMI In/Out Supports Resolution</b>	480i~1080p@50/60, 1080p@24, VGA~WUXGA
<b>IR Frequency</b>	30~50 kHz
<b>ESD Protection</b>	Human Body Model: ±8 kV (air-gap discharge) ±4 kV (contact discharge)
<b>Power Supply</b>	24 V/1.25 A DC (US/EU Standards, CE/FCC/UL certified)
<b>Dimensions</b>	102 mm (W)×113 mm (D)×25 mm (H)/TX 102 mm (W)×107 mm (D)×25 mm (H)/RX
<b>Weight</b>	252 g (TX), 256 g (RX)
<b>Chassis Material</b>	Aluminum
<b>Silkscreen Color</b>	Silver
<b>Power Consumption</b>	13 W
<b>Operating Temperature</b>	0 °C~40 °C/32 °F ~104 °F
<b>Storage Temperature</b>	-20 °C~60 °C/-4 °F~140 °F
<b>Relative Humidity</b>	20~90% RH (non-condensing)

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>CAT5e</b>	Category 5 Cable
<b>CAT6</b>	Category 6 Cable
<b>CEC</b>	Consumer Electronics Control
<b>DVI</b>	Digital Visual Interface
<b>HDCP</b>	High-bandwidth Digital Content Protection
<b>HDMI</b>	High Definition Multimedia Interface
<b>IR</b>	Infrared







---

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,  
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: [sales@cypeurope.com](mailto:sales@cypeurope.com)

[www.cypeurope.com](http://www.cypeurope.com)

v1.02