

1 HDMI to 3 HDBase™ Splitter (100m) including additional HDMI output



USE WITH PU-507RX/
PU-507WPRX FOR PoE

5Play™




The PU-1H3HBTE enables a single HDMI source input to be distributed to 3 HDBase™ outputs. The HDBase™ outputs allow uncompressed distribution of HDMI, LAN, PoE, IR, and RS-232 signals over a single CAT5e/6/7 cable up to lengths of 100m. Perfect for both residential and commercial AV installations, the PU-1H3HBTE can distribute HDMI signals to 3 displays. The product also includes an additional HDMI output for increased flexibility and can also be cascaded up to 5 times to allow distribution to potentially 50 screens or more.

The PU-507RX or PU-507WPRX Receivers are recommended to utilise the full 5-Play™ functionality of the HDBase™ outputs of this device.

FEATURES

- Supports all v1.4 HDMI resolutions including 4k
- HDMI, HDCP, & DVI compliant
- Supports full 5-Play™ Convergence : HDMI / LAN / PoE (Power over Ethernet) / IR / RS-232
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24, 4K2K; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- Supports uncompressed video/audio up to 10.2Gbps
- Supports HDCP repeating and CEC functions
- Additional HDMI bypass output provided to improve flexibility
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- Supports 3D signals

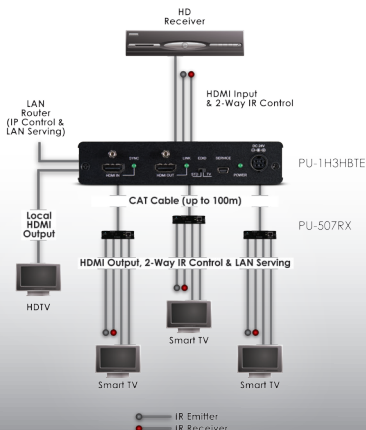

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x RJ45 (1x LAN Serving)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 3x RJ45 (3x HDMI & Propriety Data) 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	24V/4.16A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	145mm (W) x 200mm (D) x 30mm (H)
Gross Weight:	720g
Net. Weight:	580g
Packaging:	Boxed

