


New Product PU-507TX-HDVGA

Switchable HDMI & VGA HDBaseT™ Transmitter with integrated video scaling (5-Play™ inc. PoE & single LAN, up to 100m)




The PU-507TX-HDVGA allows HDMI and uncompressed HDMI signals to be transmitted over a Single CAT5e/6/7 cable to lengths of up to 100 metres. This device features full 5-Play convergence allowing the distribution of Video, Audio, LAN serving, Power over Ethernet (PoE), RS-232 and 2-way IR control functionality over the same CAT5e/6/7 cable. This transmitter allows the user to select and switch between a HDMI or VGA source whilst the integrated scaler ensures maximum resolution support for the connected display.

FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- HDMI, HDCP, & DVI compliant
- Supports HDCP repeating and CEC functions
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- 5-Play™ convergence: HDMI, LAN, POE & Control (IR & RS232)
- Supports 3D signals

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 15pin Dsub (1x PC RGBHV), 1x 3.5mm Stereo mini-jack (1x Analogue Stereo(L/R)), 1x RJ45 (1x LAN Serving), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x USB Type A (1x Service Port Propriety Data), 1x 9pin Dsub (1x RS-232 Data)
Output:	1x RJ45 (1x HDBaseT HDMI & Propriety Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	24V DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	145mm (W) x 200mm (D) x 30mm (H)
Gross Weight:	1200g
Net. Weight:	600g
Packaging:	Boxed

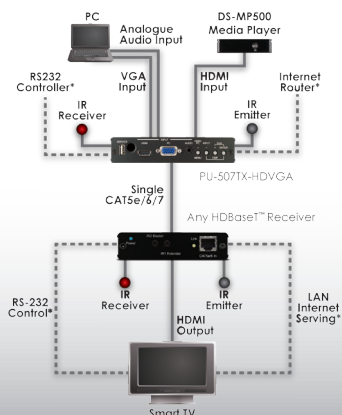

*If available on receiver

