


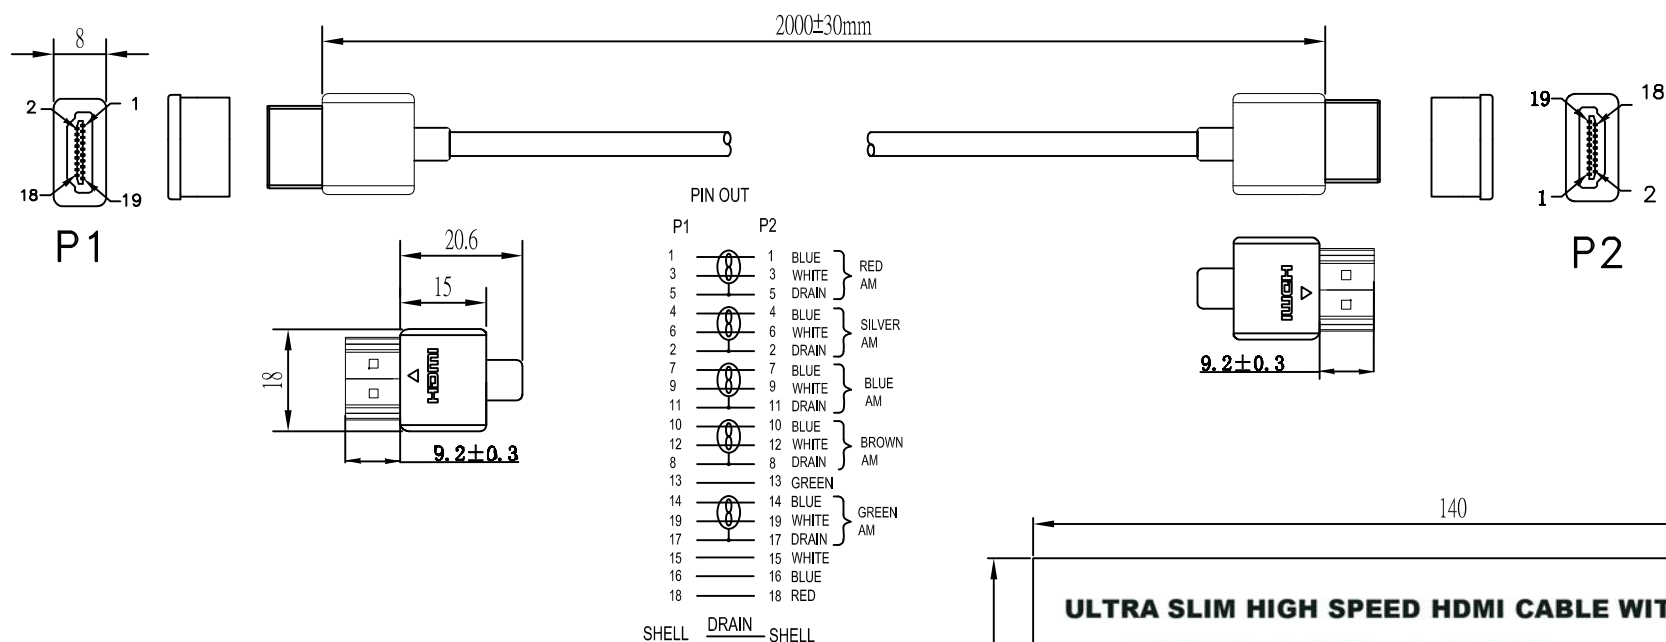

NOTES:



1. ELECTRICAL

- <1> 100% OPEN AND SHORT TEST
 <2> INSULATION RESISTANCE: DC 300V, 10 Mohm Min.
 <3> CONDUCTOR RESISTANCE: 5 ohm Max.
 <4> HDTV-DVD TEST: 4K*2K

2. CABLE MARKING

HIGH SPEED HDMI® CABLE WITH ETHERNET 4K Support

3	ALL HOOD	Moulded BLACK PVC
2	CONN	2x HDMI connector with gold plated contacts, foil with HDMI connector MODIFY
1	CABLE	(1/0.160T*1P+1C+AL+MY)*5C+1/0.60T*4C+D+AL+PVC OD3.8MM MODIFY

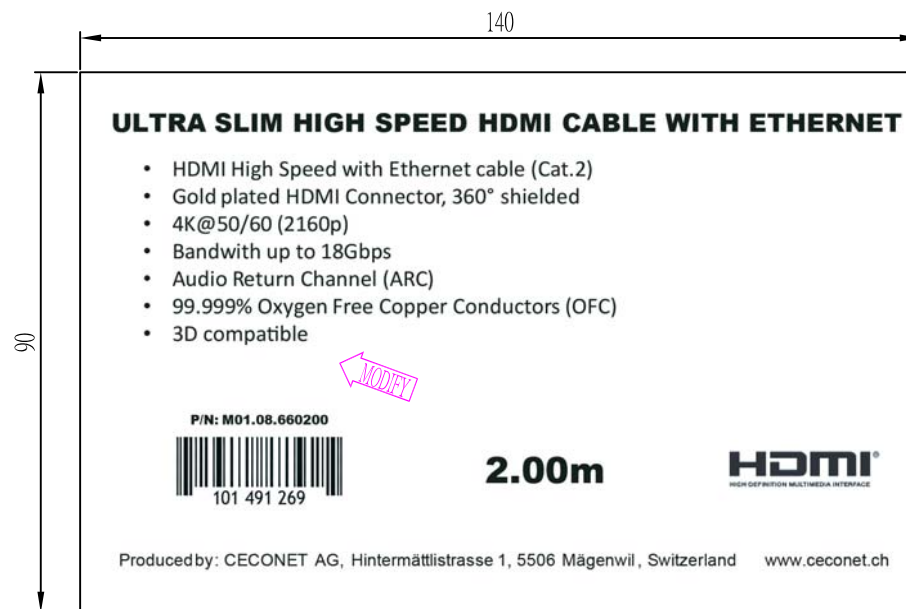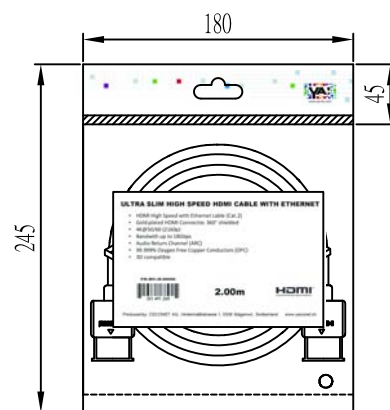

TOLERANCE		SCALE	SHEET	DRAWN BY	DATE
.X		±0.25	1 : 1	Kevin	19/04/2022
.XX		±0.10	REV. C	CHECKED BY	DATE
ANGLES		±0.5°	MATERIAL	THIRD ANGLE PROJECTION	

Ultra Slim High Speed with Ethernet
 HDMI 2.0, 1080P, sw, 2m

PART NO.
 M01.08.660200

DWG NO.

-

CECONET
 SWITZERLAND