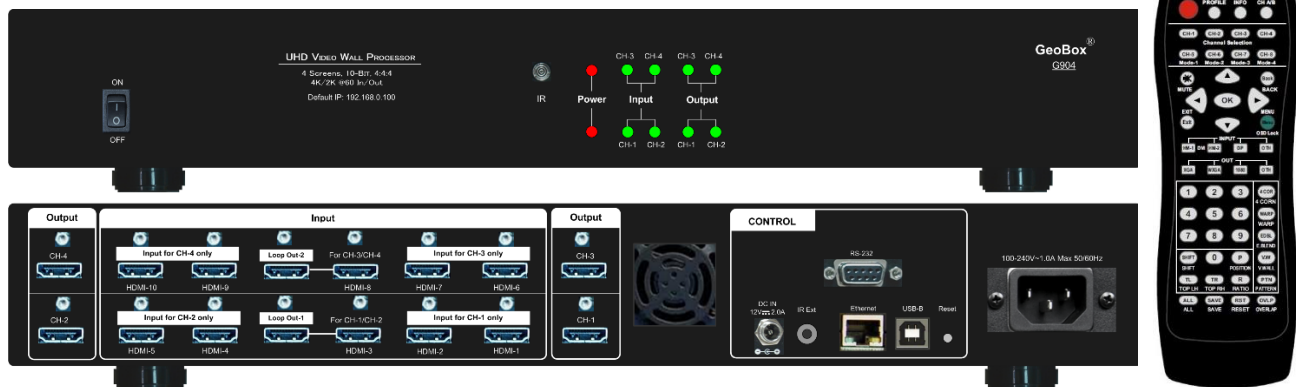




The absolute opposite of ordinary

G904 UHD Video Wall Controller Datasheet (Quad CH 8k/2k-in / 4k/60-out)

***Input: up to 4096*2160 @60Hz, 7680*2160 @30Hz,
7680*1200 @60Hz in HDMI2.0b, 4:4:4 chroma sampling
Programmable Output resolution: up to 4096*2267/60Hz
or 7680*1234/60Hz, HDMI2.0, RGB 4:4:4
Selectable output refresh rate: 24/30/50/60/100/120Hz
Support HDR 10, BT 2020 signal processing
PIP/POP & 3/4 split view MultiViewer***



Technical support:

E-mail: sales@vnstw.com

Tel: +886-2-2792-2819 Cell: +886-935-678-033

Skype: Geobox-Taiwan

Version: 2.00

Website: www.vnstw.com

Table of Contents

Introduction.....	3
Specification.....	4
Functions and features.....	5
A. Input / Output	5
B. High end 10-bit scaling up and scaling down.....	5
C. PIP/POP and MultiViewer function.....	5
D. Video Wall function.....	6
E. Various color adjustment.....	6
F. Image rotation and flip.....	6
G. 3D function.....	6
H. Native 1:1 pixel to pixel image display mode.....	6
I. Image freeze.....	7
J. Quick PIP ON/OFF and two input seamless swap.....	7
K. System control and other features.....	7
Applications.....	7
Feature illustration	
A. 4K video wall.....	8
B. Pixel to pixel 8K/2K video wall.....	9
C. Multiple unit cascade (aspect ratio is adjustable)	10
D. Multiple unit cascade (each monitor can have independent PIP/POP)	10
E. 4K creative video wall.....	11
F. Creative video wall with multiple unit cascade.....	11
G. PIP/POP and MultiViewer functions.....	13
H. MultiViewer: two 3 split views or one 4 split views in one UHD monitor.....	15
I. [SBS 2/1].....	16
J. [4x Split] & [4x T/B].....	16
K. 5 Windows in one UHD monitor.....	17
L. MultiViewer: 6 split views in one UHD monitor.....	18
M. MultiViewer: 9 split views in one UHD monitor.....	18
N. Video wall with 4x PIP windows.....	19
O. Video wall with 8x contents in 4x UHD monitors.....	19
P. Front end processor for edge blending system.....	20
Q. Image flip & rotation.....	21
R. Image aspect ratio adjustment.....	21
S. Image cropping and rotation.....	22
T. Crop image for LED display.....	22
U. Quick PIP ON/OFF and two inputs quick seamless swap.....	23
Disclaimer/Copyright statement.....	24

Introduction

The G904 is a multi-function signal processor supporting 8K/2K 30Hz and 4K/60Hz input and 4K/60Hz output. Each unit can display all-in-one content across an entire video wall or discrete true 4K/60 content on each 4K monitor. Due to its special system design, it can also function as a multi-viewer to display up to seven contents on one UHD monitor. Multiple units can be cascaded to build large-scale display systems and support 4/6/9/16 split views in MultiViewer mode.

Each G904 has four 4K/60 output channels, with each channel featuring three HDMI 2.0 inputs (one port shared with another channel) and one HDMI 2.0 output. Inputs support resolutions up to 4096x2160 @60Hz and 7680x2160 @30Hz with 4:4:4 chroma sampling. Two HDMI 2.0 loop-out ports provide daisy chain connections for cascading multiple units in a large-scale display system.

The programmable output range spans from 640 to 7680 pixels horizontally (8 Px/step under 230 MHz, 16 Px/step above 230 MHz) and from 480 to 3840 pixels vertically (with 1 pixel/step). It supports resolutions up to 4096x2267 @60Hz or 7680x1234 @60Hz per channel, with a maximum pixel clock limited to 600 MHz. The output refresh rate is selectable from 24/30/50/60/100/120Hz. It supports various input sources and timings, including non-VESA standard timings.

The G904 integrates a 10-bit high-end processor with motion adaptive de-interlace, low angle smooth algorithm, and 3:2/2:2 pull-down cadence. Its programmable EDID ensures optimized input timing for the best video performance.

It includes comprehensive color adjustments, such as brightness, contrast, hue, saturation, sharpness, color temperature, and discrete RGB gain adjustments. It can automatically detect and process HDR BT.2020 input signals, outputting them as full-color 4:4:4 RGB SDR signals. Users can select deep color mode for true 10-bit color output, achieving smooth gradient color.

The G904 video wall function allows for cropping specific locations and resolutions in the source image for each output channel. The overlap function enables users to change image position, aspect ratio, and cropping area by up to ± 1800 pixels on each edge. Users can freely adjust the aspect ratio and image position, with independent image flipping and rotation at 90, 180, and 270 degrees available for each channel. This functionality supports the creation of creative video walls with any LCD array in both landscape and portrait orientations.

PIP (picture in picture) and POP (side-by-side or top/bottom) are standard functions in each output channel. The G904 also includes embedded 3-split view and 4-split view MultiViewer functions. PIP images can be sourced from 4K/60 content, with sizes ranging from 320x180 to 1920x1200, and can be positioned anywhere on the screen. Both main and sub-images can be flipped and rotated at 90, 180, and 270 degrees with quick, seamless swaps. The cropping range and position in both main and sub-images are adjustable. The maximum display windows on the video wall with four monitors is ten.

Through the combination of PIP and POP, the G904 can serve as a multi-viewer to display up to seven images on one monitor (six split views plus one PIP). MultiViewer applications with 3/4 split views and 6 split views on one UHD monitor in portrait or landscape orientations are standard features of the G904.

Users can operate and set up the G904 using an IR controller, USB, Web GUI, or Ethernet. Designed for 24/7 operation, the G904 provides easy configuration, low entry barriers, cost-effectiveness, reliability, and flexibility.

Specifications

- ✧ Two processing modules in each G904. Each processing module has 5x HDMI 2.0b input ports, 2x HDMI 2.0b output port and 1x HDMI 2.0b loop out port for daisy chain connection.
- ✧ Loop out port can be daisy chain up to 10 processing modules without HDMI splitter to build big scale display system.
- ✧ Each channel will share one input port with other channel and has 2x additional HDMI 2.0b input ports for independent display, including PIP/POP/multi-viewer.
- ✧ Max. input: 4096*2160 @60Hz, 7680*2160 @30Hz or 2160*7680 @30Hz (up to 600MHz).
- ✧ Supports interleaved and progressive input signals with 4:4:4 10-bit color under 600 MHz.
- ✧ Support High Dynamic Range (HDR): SMPTE ST-2084, SMPTE ST-2086 and BT.2020 HDR 10 input signal processing.
- ✧ Support non-VESA standard input timings.
- ✧ Preset 17 output timing modes with selectable 8-bit/10-bit color and HDCP control settings.
- ✧ Programmable output range is from 640-7680 in horizontal (with 8 Px/step under 230MHz, 16 Px/step above 230MHz) and 480-3840 in vertical (with 1 pixel/step). Max. programmable Output: up to 4096*2267 @60Hz or 7680*1234 @60Hz (maximum pixel clock < 600MHz).
- ✧ Selectable refresh rate: 24/30/50/60/100/120
- ✧ Output signal: SDR, progressive full color RGB, 4:4:4, 8/10-bits under 600MHz.
- ✧ HDCP: V2.2/V1.4 in HDMI.
- ✧ Embedded video wall function for image split, cropping, location assignment, position adjustment and precise bezel compensation.
- ✧ Decode 3D signal for passive 3D display and convert 3D format into side by side, Top/Bottom RH/LH Line Alternative or frame sequential output for various 3D display.
- ✧ One frame latency: 16.6ms (V=60Hz)
- ✧ OSD menu position can be shifted for convenient OSD operation.
- ✧ Programmable EDID in the range at H= 1024-
- ✧ Flexible aspect ratio adjustment in each edge up to +_ 1800 pixels.
- ✧ Each channel has independent PIP/POP function with PIP image size from 320*180 up to 1920*1200 resolution with flexible position, rotation/flip and cropping area adjustment.
- ✧ Display 4 types of 3 split views on one UHD monitor.
- ✧ Display 4 or 6 split views for one UHD monitor.
- ✧ PIP main and sub-window can be quick swap under FHD in/out with full screen display.
- ✧ Color adjustment in main and PIP images.
- ✧ Image Freeze by click keypad on IR controller.
- ✧ Frame lock for multiple unit synchronization.
- ✧ Native 1:1 pixel to pixel image display with original quality.
- ✧ 10-bit processor, 3:2:2 cadence, low angle smooth algorithm and 3D motion adaptive de-interlace.
- ✧ High quality scaling engine for image scaling up and down among SVGA to UHD
- ✧ Support xvYCC 8/10/12-bit wide color gamut input signal processing.
- ✧ Individual 90/180/270 rotation, flip, cropping, scaling & color adjustment up to 4k/60 input in main & PIP/POP-image.
- ✧ Embedded HDMI audio output. While implement PIP/POP, user can select audio from main or sub-image.
- ✧ Selectable and programmable EDID
- ✧ ESD Protection: ±15kV (Air-gap discharge), ±8kV (Contact discharge)
- ✧ Power supply: AC 100V-250V /0.2A
- ✧ Max. Power consumption: 36W
- ✧ Working environment: 45° C, 10-90% RH
- ✧ Control: IR, RS232, USB, Ethernet
- ✧ 10 system settings can be stored and backup.
- ✧ Dimensions: 440mm*162mm*58mm
- ✧ Weight: 2.41kg
- ✧ CE/FCC/RoHS/UKCA/KC Certified
- ✧ 2 Year Warranty, extension package is available up to 5 years.

Function and features:

A. Input and output

- 10 HDMI2.0b input ports and 4 HDMI2.0 output ports.
- One common HDMI 2.0b input & two individual HDMI 2.0b inputs specific for each output channel.
 - Support 4096*2160 @60Hz, 7680*2160 @30Hz input resolution with 4:4:4 chroma sampling.
 - Connect with various video sources and support none VESA standard input resolution up to 120Hz.
- 4x HDMI 2.0 outputs with editable output resolution: The range is from 640-7680 (8 Px/step under 230Mhz, 16 Px/step above 230Mhz) in horizontal and 480-3840 (1 pixel/step) in vertical directions (maximum pixel rate is 600 MHz). Max. output: 4096*2267/60, 7680*1234/60Hz (Max. 600MHz).
- Preset output resolutions: 1024*768, 1280*720, 1280*800, 1280*1024, 1360*768, 1400*1050, 1600*1200, 1920*1080 (50/60Hz), 1920*1200 (30/60Hz), 2560*1440, 3200*1800, 3840*2160 (50/60Hz), 3840*2400 @60.
- All outputs are RGB 4:4:4 progressive signals.
- Selectable output refresh rate: 24/30/50/60/100/120 Hz.
- Support selectable 8-bit/10-bit Deep Color output mode.
- Automatically detect HDR BT. 2020 input signal and processing with full color SDR RGB 4:4:4 output.
- Two HDMI 2.0 loop output port for daisy chain connection to build big system with multiple units.

B. High end 10-bit video processor

- High end 10-bit scaling engine for image scaling up and down in the range from XGA to 8K/2K.
- Processor with 3D motion adaptive de-interlace, low angle smooth algorithm and 3:2/2:2 film mode detect and recovery function.
- Complete color adjustment function, including brightness, contrast, hue, saturation, preset color mode, and independent RGB color adjustment.

C. PIP/POP with MultiViewer function

- [PIP]: Picture in Picture display with any two inputs in each channel.
- [SBS]: Horizontal Side by Side display.
- [Top/Bottom]: Top/Bottom display.
- [SBS 2/1]: 2/3:1/3 side by side display with monitor at landscape position
- [POP3]: One image at LH side and top/bottom two images at RH side in landscape monitor.
- [POP4]: One image at Top and two images at bottom in landscape monitor.
- [3X SBS]: 3 split views at landscape. The center image size is adjustable from 1/6 to 5/6 horizontal size.
- [3X T/B]: Three split views at portrait.
- [4x Split]: is not available in G904 due to only 3 inputs in each channel but this function can be implemented through 2 channels: one [4x Split] + one PIP.
- [4x T/B]: One big image at the top and 3 small images at the bottom. User can implement through two channels: One [4x T/B] + one PIP

- PIP (picture in picture): with flexible PIP size (320*180 to 1920*1200), location and aspect ratio.
- PIP main and sub-window can be seamless quick swap under FHD in/out with full screen display.
- Except [4x Split] & [4x T/B], PIP/POP functions can support monitor at portrait and landscape position. PIP/POP images also support 90/180/270 degrees rotation and flip up to 4k/2k 60Hz.
- Cropping function is available in main and sub-images for further location, size and aspect ratio adjustment as well as creating image borders with black or blue color.
- Color individual adjustment in main and sub-images.
- All the inputs for main and sub-images can be up to 4k/2k 60Hz 4:4:4 signals.

D. Video wall function

- Serve as irregular video wall controller with LCD at landscape or portrait position.
- One G904 can control up to 4 monitors with unlimited cascaded with multiple units.
- Split the image up to 15x15 sections from single signal source in H&V directions. Assign split image for specific monitor. Each output can be further adjustment with +_ 1800 pixels in H&V for image position shift, aspect ratio adjustment, bezel compensation, creative video wall and creating overlap region for projector edge blending.
- Flexible image aspect ratio and display image position adjustment.

E. Various color adjustment

- Independent R.G.B color gain adjustment.
- Preset color temperature: Standard, Reddish, Bluish
- Brightness, contrast, Hue, saturation and sharpness adjustment.
- Color adjustment can be applied to both main and sub-images.

F. Image rotation and flip

- Image 90/180/270 degrees rotation up to 4k/60Hz input resolution.
- Image flip in Front/Rear, Left/Right and Top/Bottom directions.
- PIP/POP main and sub-image can be rotated independently.

G. 3D function

- Support Side by Side, Top/Bottom, Line interleaved, Frame sequential and frame packed 3D signal decoding and format conversion.
- Convert 3D signal into separate RH/LH eye frame, Side by Side, Top/Bottom, RH/LH Line Alternative or frame sequential output formats for active 3D display.
- Decode 3D formats into RH/LH for passive 3D display.

H. Native 1:1 pixel to pixel image display mode

When single content is displayed on the screen, user has below choices for the display:

- [Full screen]: to display the content with full screen.
- [Original AR]: to display content with original aspect ratio
- [1:1]: to display native pixel to pixel image at the center of the screen.
- Further cropping and aspect ratio adjustment is still available.

I. Image freeze

User can use remote controller [Shift] hotkey to freeze video image.

J. Quick PIP ON/OFF and two inputs seamless swap

- User can use remote controller [CH A/B] hotkey to turn ON/OFF PIP image.
- If the output resolution is set to FHD or 1920x1200, user can assign one input signal to main and another signal to PIP channel and execute quick input seamless swap through this function.

K. System control and other features

- Professional design and reliable for 7/24 working environment.
- Full function system setup through remote controller, USB, WebGui or Ethernet (Including through WiFi by PC, Mobile or iPad).
- Firmware update via USB or Ethernet.
- User can select main or sub-image audio while implement PIP/POP.
- OSD menu position can be shifted for convenient OSD operation.
- PC tool can control multiple processors simultaneously through USB or Ethernet.
- RS232 & Ethernet system control compatible with most of control system.
- User can select blue or black background color when no input signal is detected.
- Programmable EDID in the range at H=1024~4080, V=720~3840.
- BOX ID and programmable IP address for convenient multiple unit control at the same time.
- User can save up to 10 settings and can be recalled by remote controller, RS232, USB or network.
- System settings can be backup in PC and copied to another unit.
- Automatic power ON/OFF through input signal control. While no input signal is detected, it will shut down output automatically. User can power ON/OFF the system through the control in signal source.

Applications

- 4k/2k video wall with ability to display discrete 4k content in each monitor.
- Multi-viewer: 3 split views, 4 split views and 6 split views for UHD monitor.
- Display up to 7 contents in one UHD monitor (6 split views + one PI across entire screen).
- One G904 plus one G901 to build 9 split views.
- Cropping specific image area for selectable output resolution & refresh rate.
- 3D format conversion and 3D decoding for passive 3D display.
- Split image and set overlap pixels for up to 4 projector edge blending system.

Features Description

A. 4k video wall

4K Video wall

Profile 1




Profile 2




Each monitor displays different style

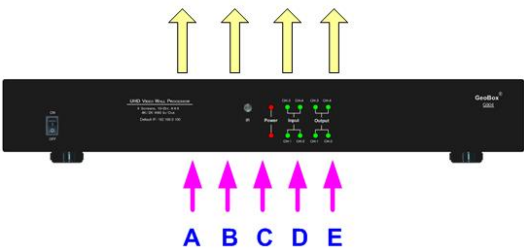Video wall with PIP in each monitor




Mixed different display mode

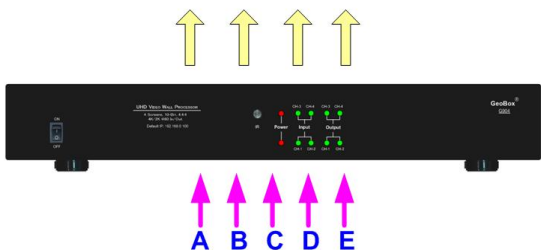


B. Pixel to pixel 8k/2k video wall

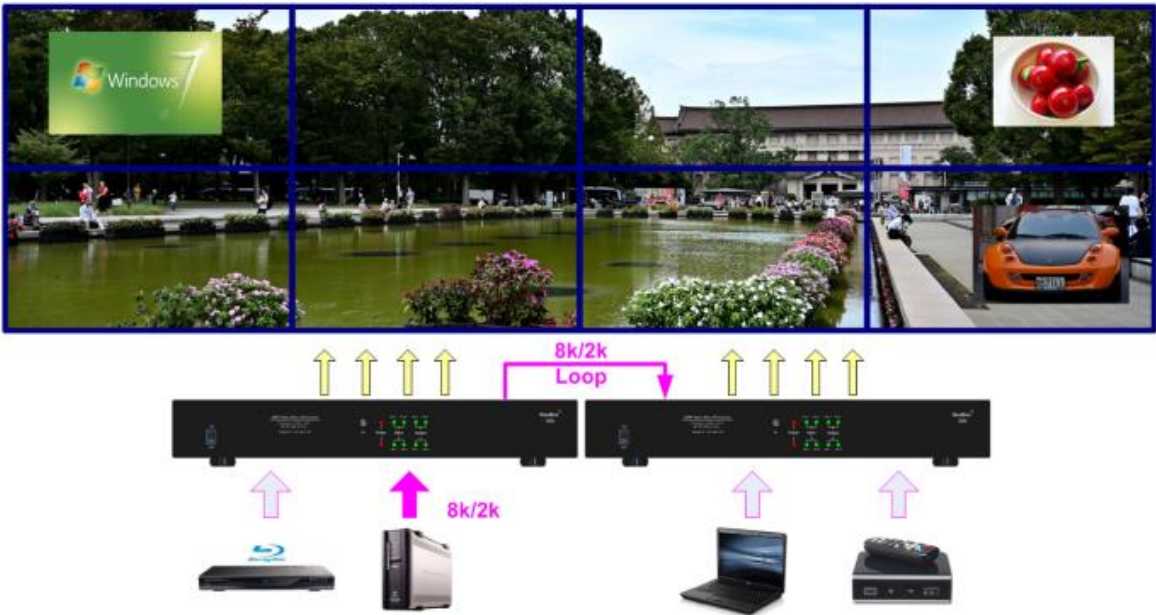
Pixel to pixel 8k/2k video wall with the pixel to pixel video quality. Each monitor can show PIP or POP multi-window images



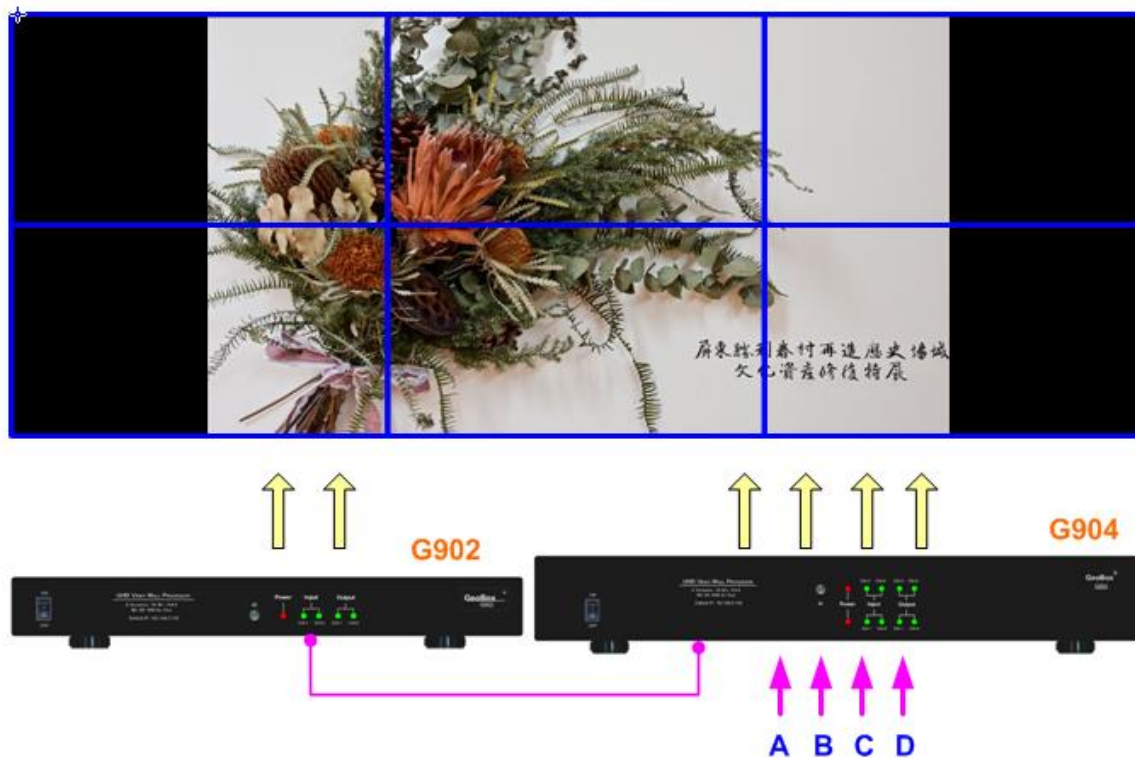C. Multiple unit cascade (aspect ratio is adjustable)



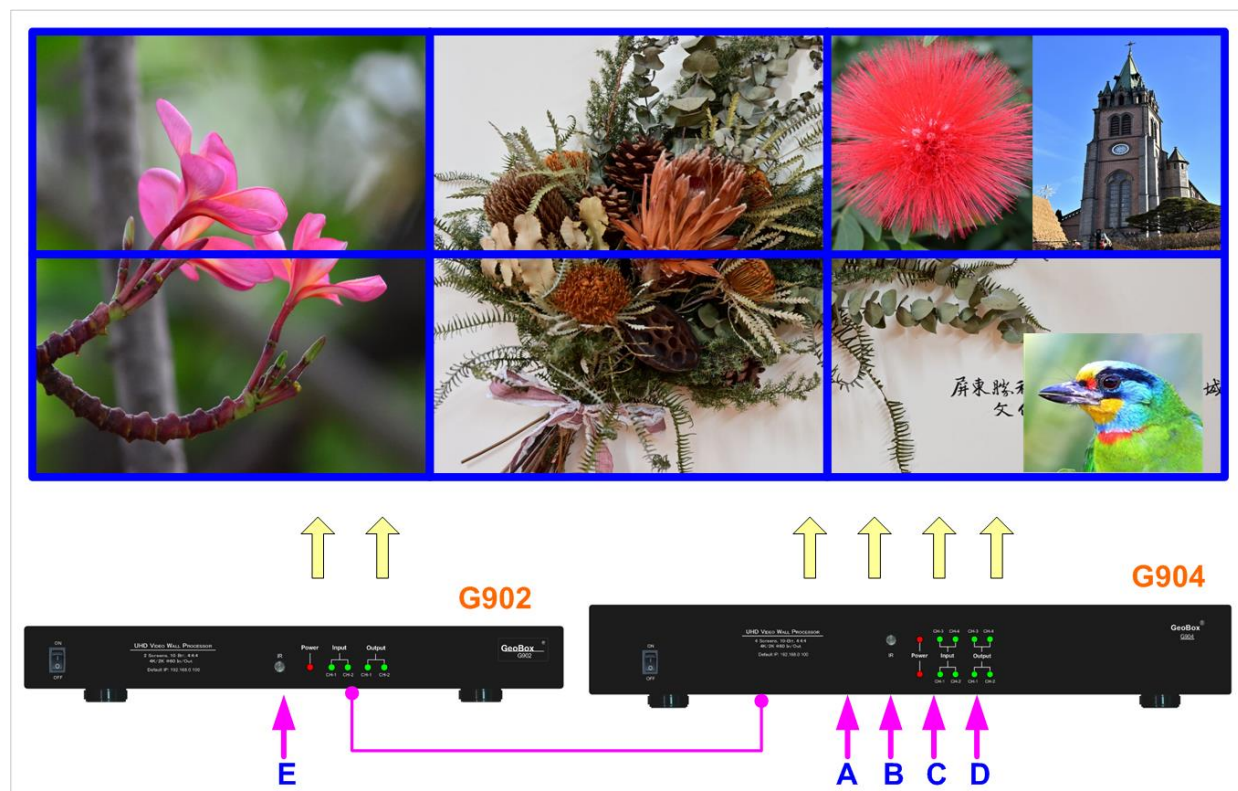D. Multiple unit cascade (each monitor can have independent PIP/POP)





E. 4K Creative Video wall



F. Creative video wall with multiple unit cascaded

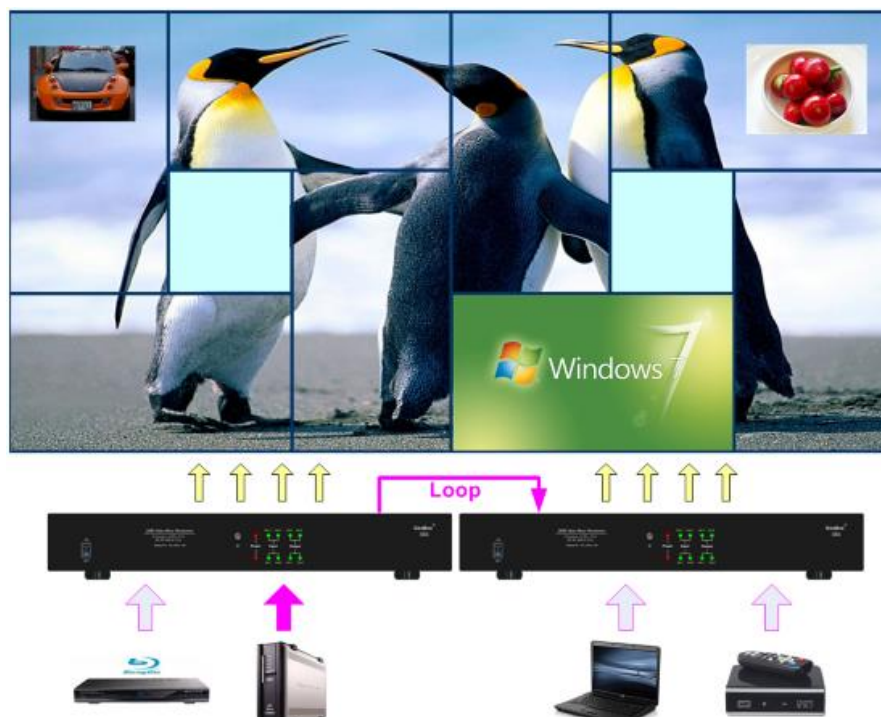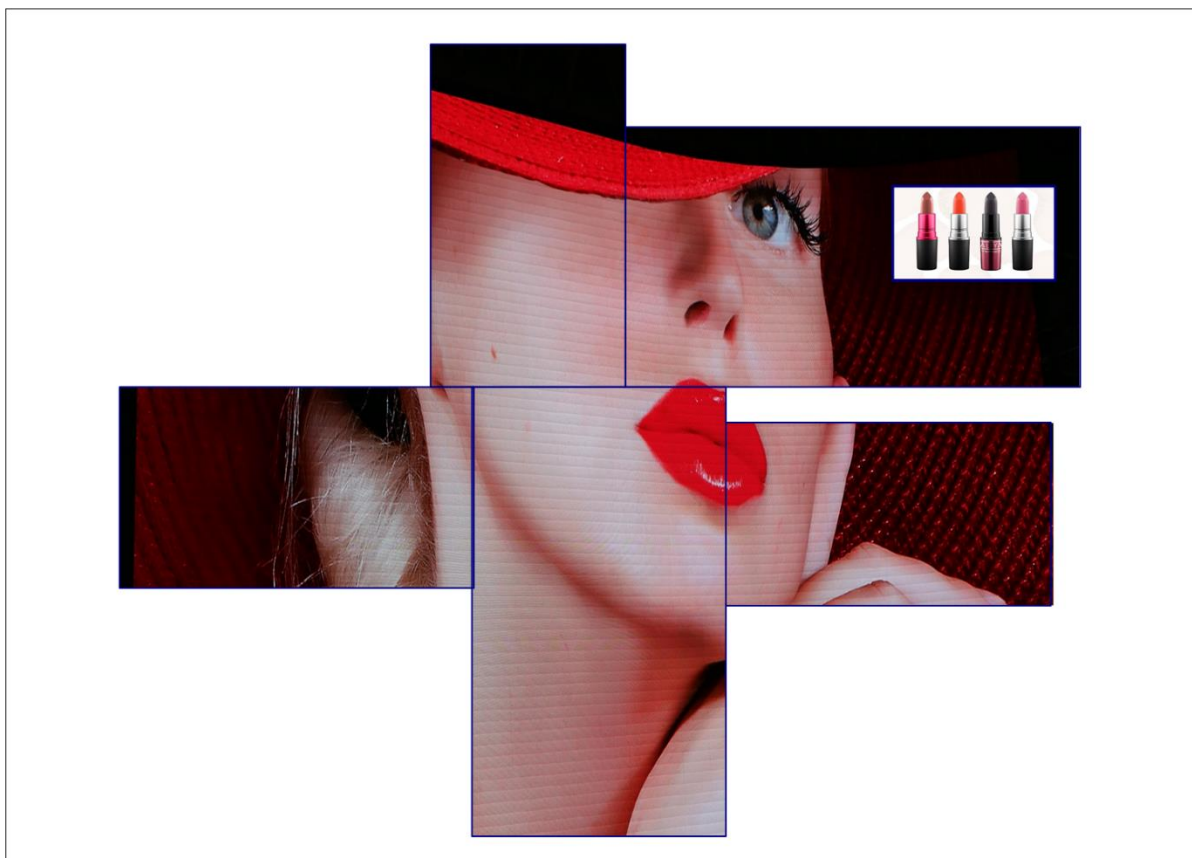G904 can be cascaded to build big video wall with PIP/POP in each monitor or across multiple monitors. There is no quantity limitation in cascade.






G. PIP/POP function

PIP/POP main menu

- [PIP]: Picture in Picture display with any two inputs in each channel.
- [SBS]: Horizontal Side by Side display.
- [Top/Bottom]: Top/Bottom display.
- [SBS 2/1]: 2/3:1/3 side by side display with monitor at landscape position
- [POP3]: One image at LH side and top/bottom two images at RH side in landscape monitor.
- [POP4]: One image at Top and two images at bottom in landscape monitor.
- [3X SBS]: Three split views at landscape. The center image size is adjustable.
- [3X T/B]: Three split views at portrait.
- [4x Split]: is not available in G904 due to only 3 inputs in each channel but this function can be implemented through 2 channels: one [4x Split] + one PIP.
- [4x T/B]: One big image at the top and 3 small images at the bottom. User can implement through two channels: One [4x T/B] + one PIP

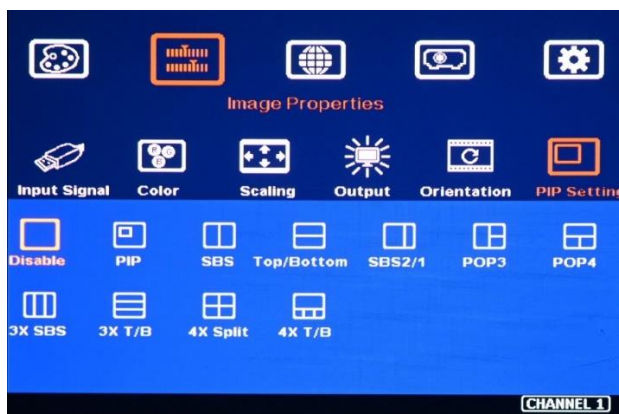OSD menu



GCT PC Tool

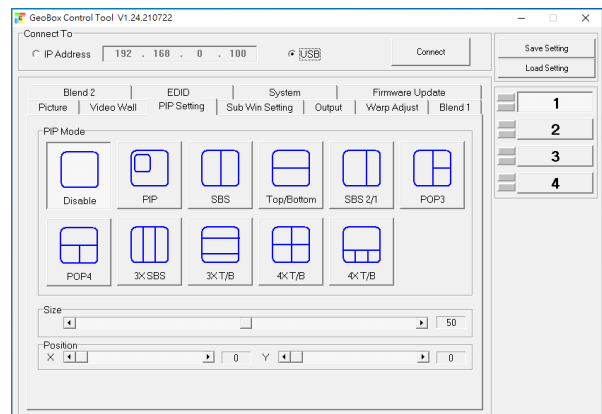
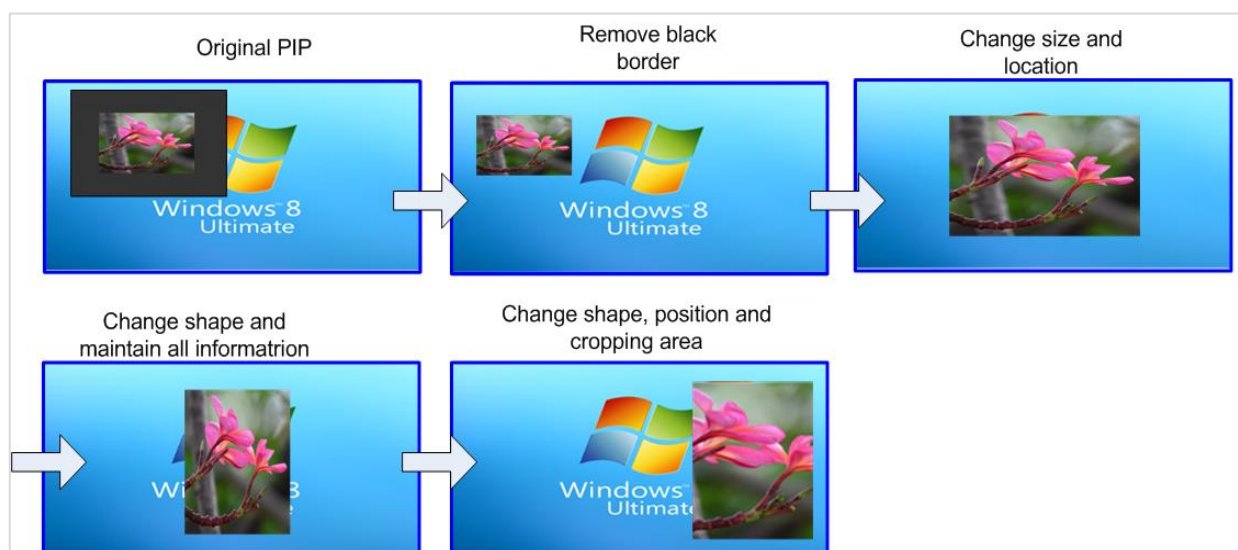




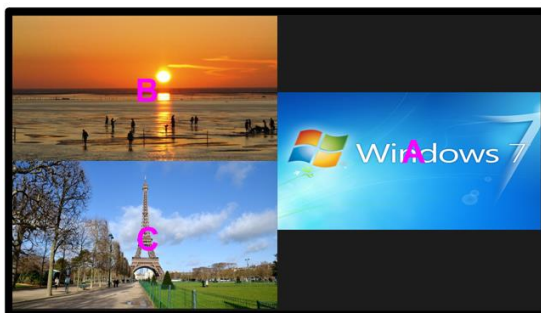


Image cropping in main and sub-images

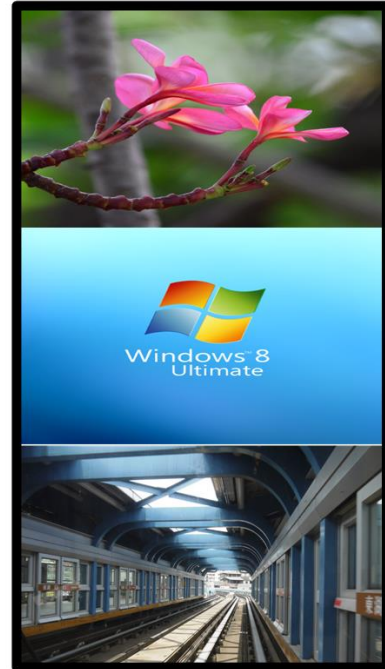


H. MultiViewer: two 3 split views in one UHD monitor


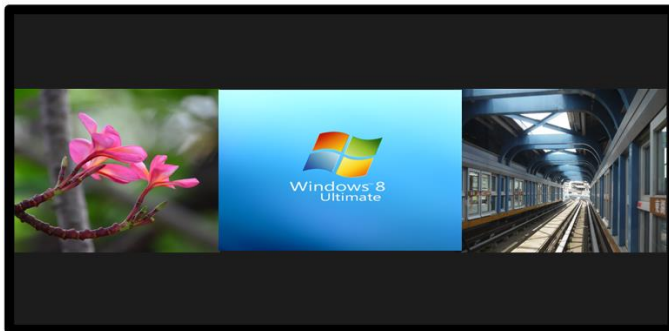
- Each window can be cropped, rotated and adjust aspect ratio.



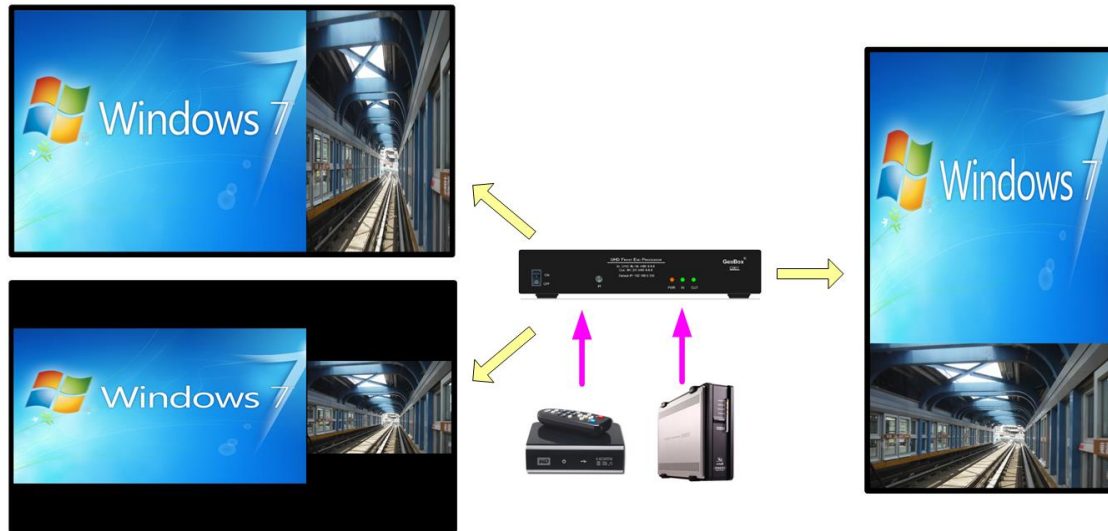I. [SBS 2/1]




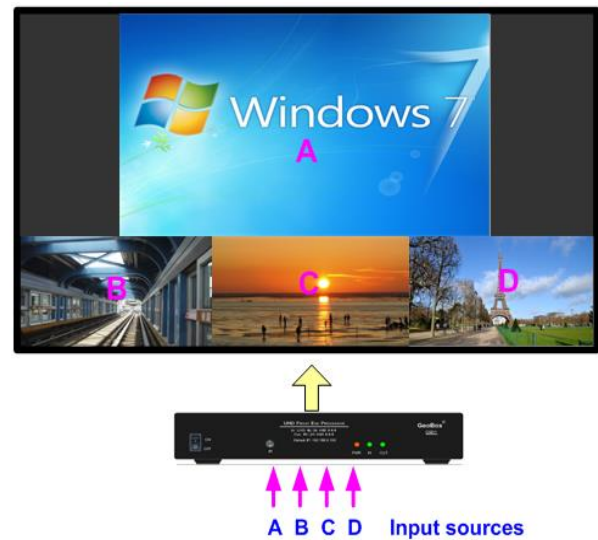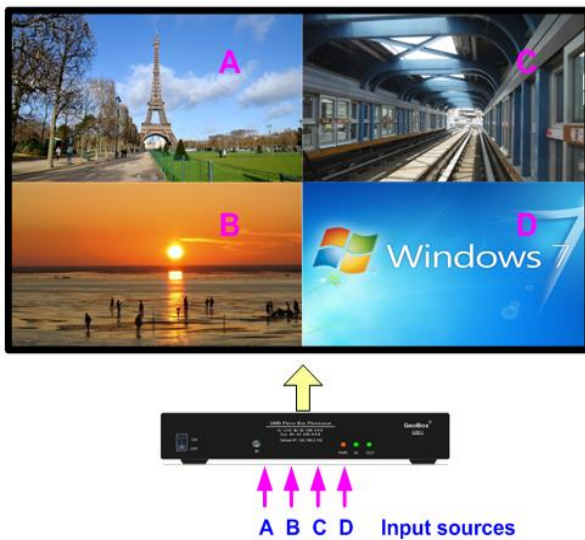J. [4x Split] & [4x T/B]



- Due to input port limitation, user needs to use multiple channels to achieve [4x Split] view function.
- User can use single channel processor G901 to achieve the above [4x Split] and [4x T/B] functions.

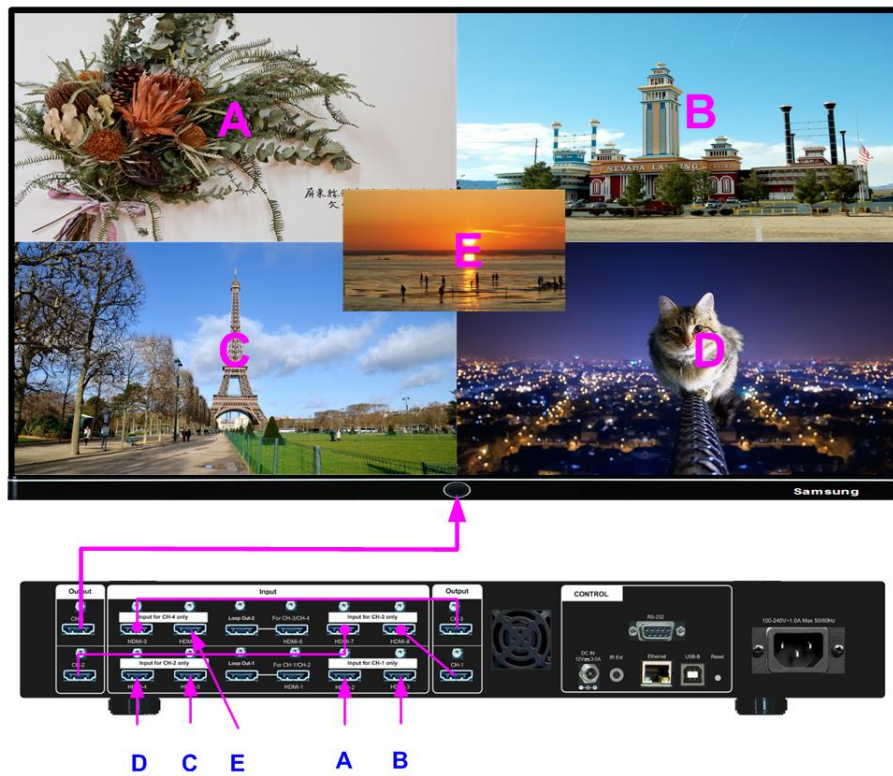K. 5 windows in one UHD monitor: One 4 split views + one PIP across entire window




CH1: SBS, output to 3rd CH

CH2: SBS, output to 3rd CH

CH3: Top/Bottom with output from CH1 & CH2


CH4: PIP from CH3 + external signal source (PIP)

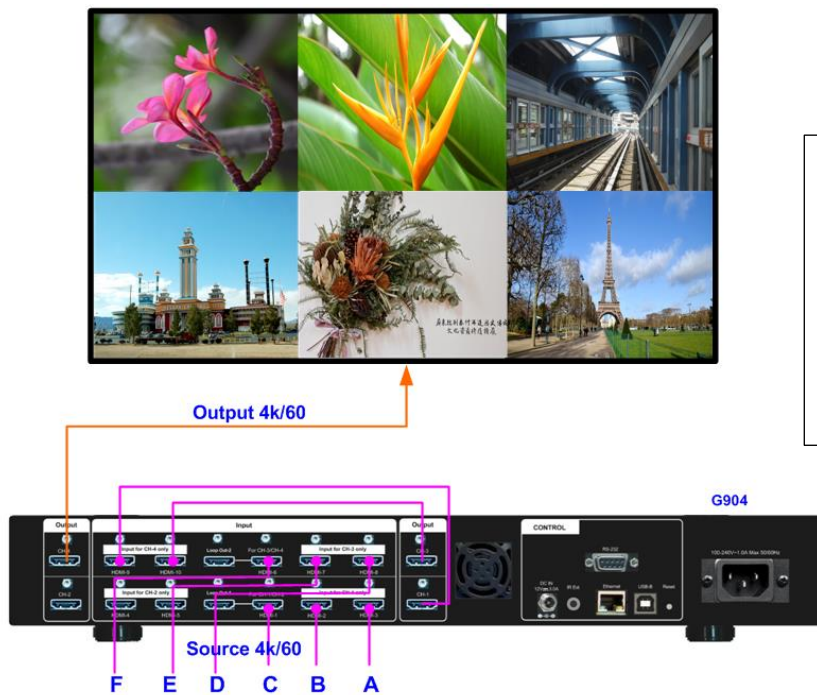L. MultiViewer: 6 split views in one UHD monitor




Two channels can build two 3 split view images. Another channel to execute Top/Bottom POP to combine two 3 split views images into one 6 split views for one UHD monitor.

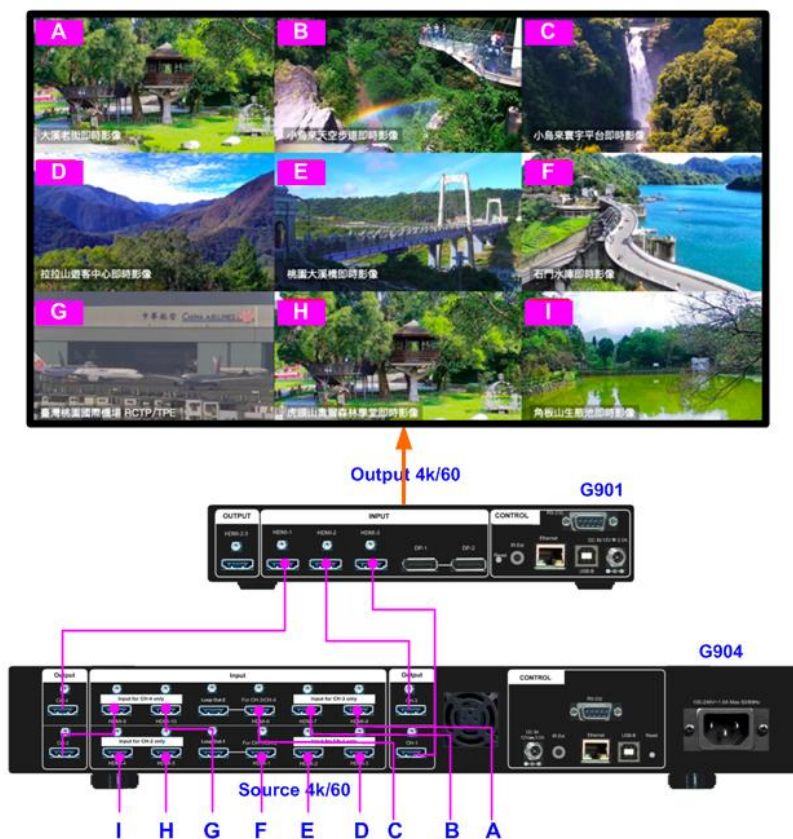M. Multi-viewer: 9 split views in one UHD monitor




CH1 & CH3 can build two 3 split view images. CH2 & CH4 create 3rd 3 split view through [SBS2/1], then use G901 to combine three 3 split view windows into one 9 split view windows for one UHD monitor.

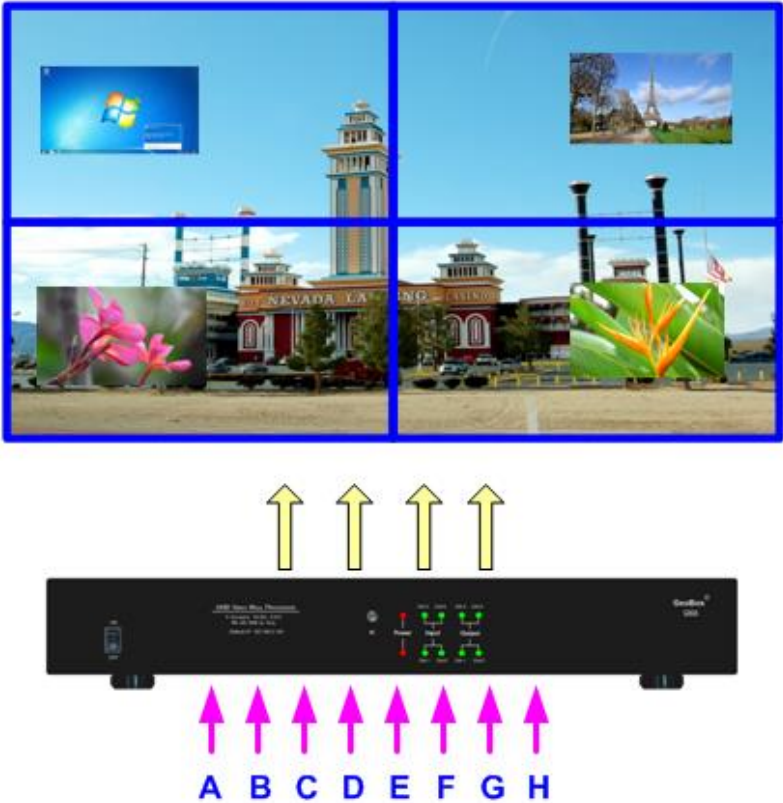N. Video wall with 4x PIP images




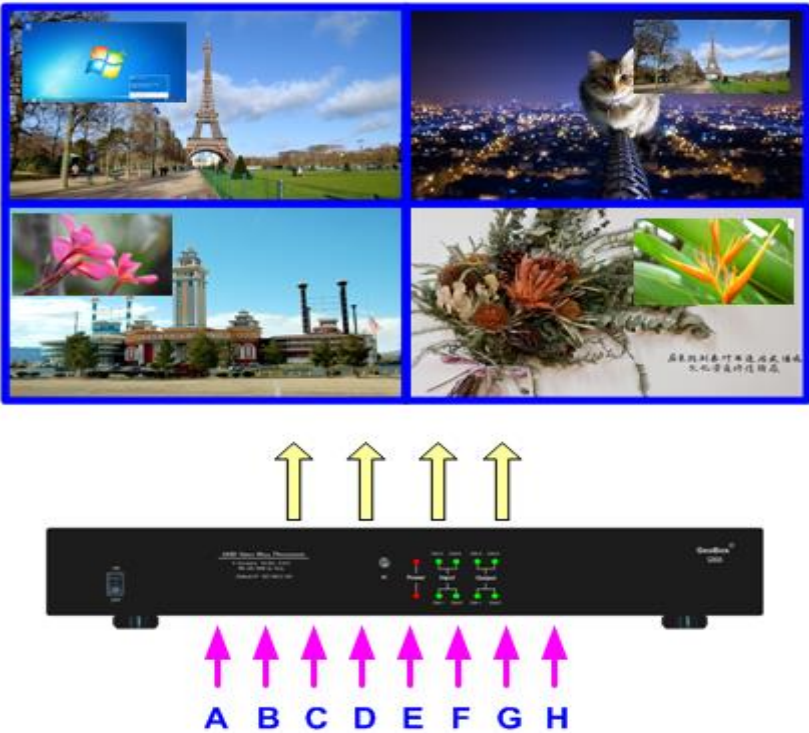O. Video wall with 8x contents in 4x UHD monitors



P. Front end processor

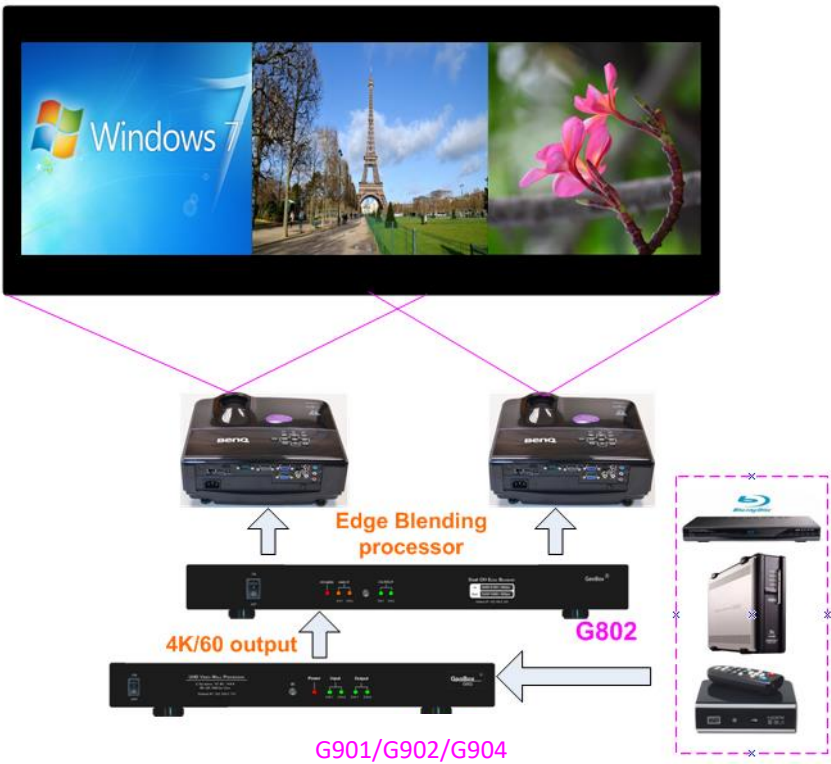G902/G904 as front-end processor for big display system to provide 3 split views.




G904 as front-end processor for big display system to provide 5/6/7 contents in one display




Q. Image Flip & Rotation

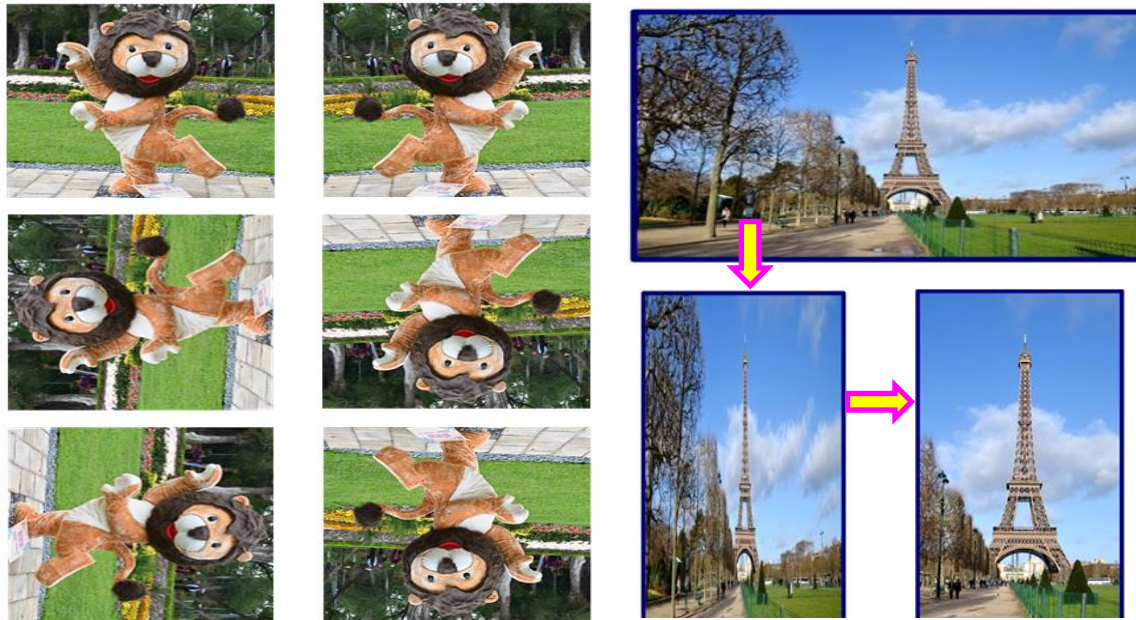Image 90/180/270 degrees rotation and flip up to 4k/60Hz resolution in both main and sub-images independently. After image rotation or flip, user can also adjust the aspect ratio and cropping area.




R. Image aspect ratio adjustment

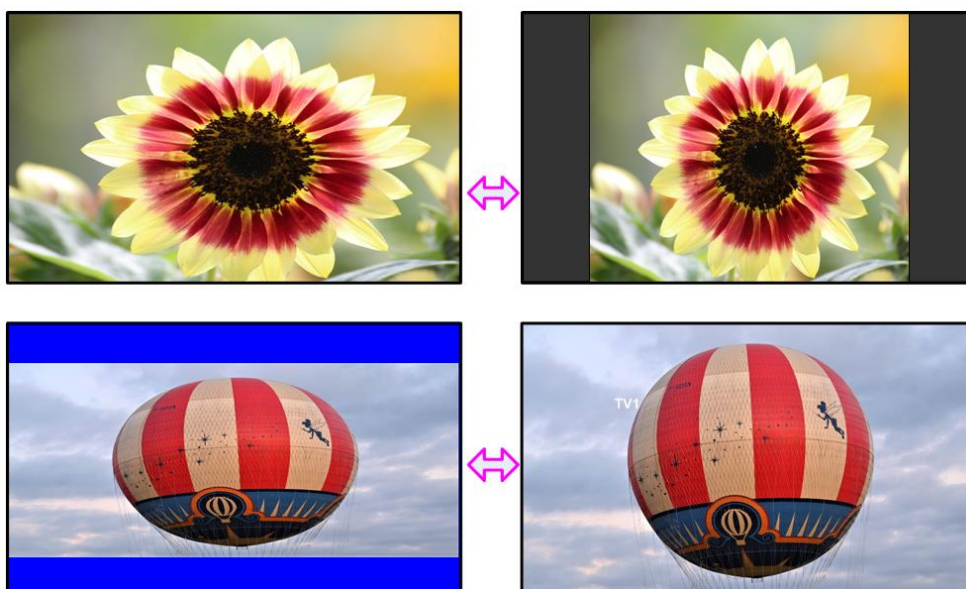Overlap function in Video Wall settings can change cropping area, image position and adjust aspect ratio. Each edge of the image has ± 1800 pixels adjusting range.



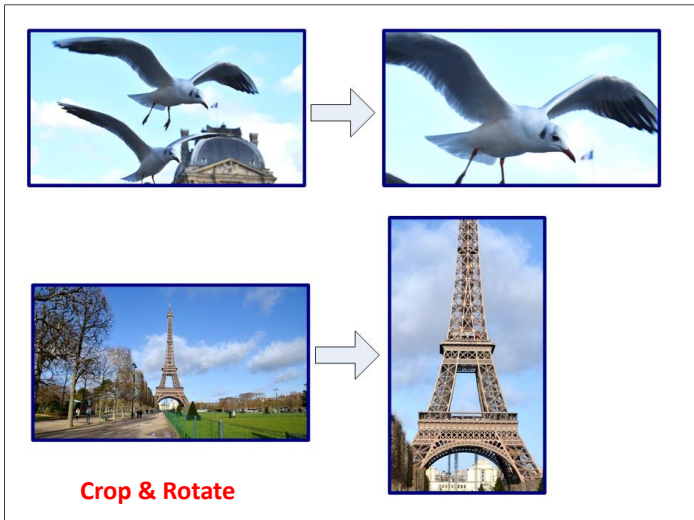
S. Image Cropping and rotation



- ✓ Image cropping at any location in both main and PIP/POP (sub-image) independently.
- ✓ Image cropping function can co-exist with image rotation and flip functions.


T. Image cropping for LED display

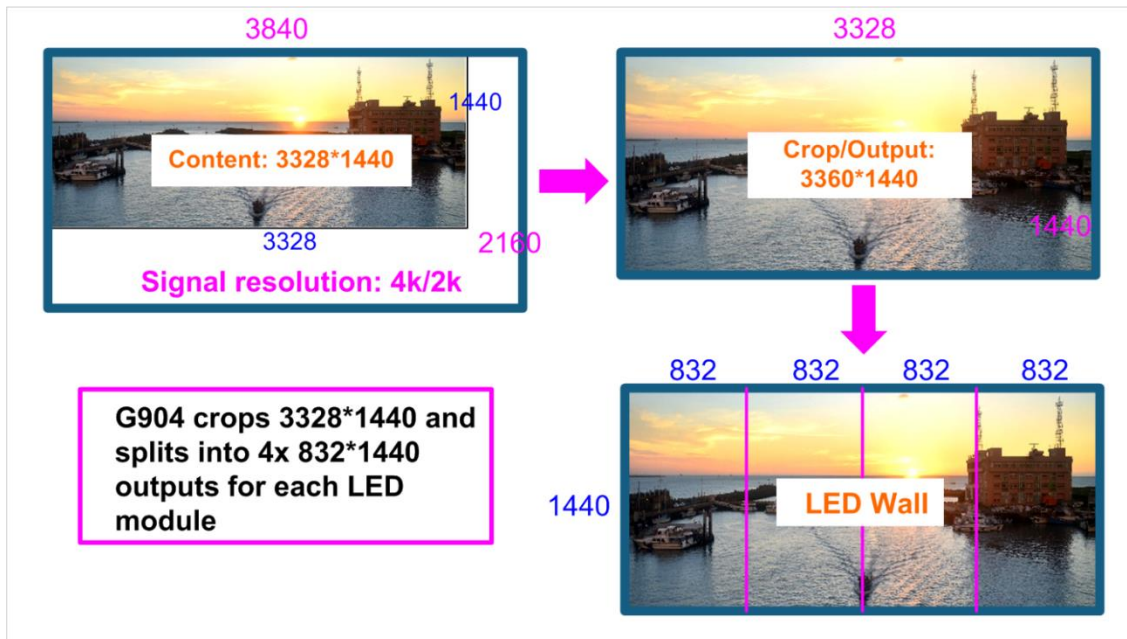In order to match LED requirement, the content resolution is 3328*1440, media player output is 4k/2k.



U. Quick PIP ON/OFF and two inputs quick seamless swap

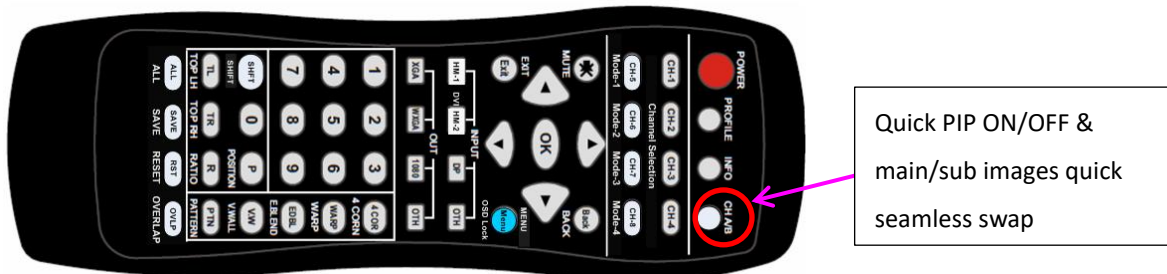- CH A/B key in remote controller can execute quick PIP image on/off.



- When the output resolution is set to 1920x1200 or 1920x1080, user can add full screen PIP image on top of main image. User can click [CH A/B] key to turn on/off PIP image to swap main/sub-images seamlessly.
- This image swap can be applied to any two inputs. Please assign one input to main image and another input to PIP image, then click [CH A/B] key to execute seamless quick swap between these two inputs.



Disclaimer/Copyright Statement

Copyright 2024, VNS Inc. All Right Reserved

This information contained in this document is protected by copyright. All rights are reserved by VNS Inc.

VNS Inc. reserves the right to modify this document without any obligation to notify any person or entity of such revision. Copying, duplicating, selling, or otherwise distributing any part of this document without signing a non-disclosure agreement with an authorized representative of VNS Inc. is prohibited. VNS Inc. makes no warranty for the use of its products and bears no responsibility for any error of omission that may appear in this document.

Product names mentioned herein are used for identification purposes only and may be trademarks of their respective companies.