


NOTES:

1. MATERIAL
 - 1.1 HDMI CABLE: (7/0.10BC*1P+7/0.10BC+AM)*7PCS+7/0.12BC*3C +7/0.12BC*1P+AM+7/0.12BC+128/0.12ALM+PVC BLACK JACKET
OD: $\phi 7.3 \pm 0.2$ mm
CABLE MARKING: VW-1 DVI CABLE 80° 30V
 - 1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS GOLD PLATED SHELL.
 - 1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
 - 1.4 ALL HOOD: MOLDED BLACK PVC.
2. ELECTRICAL
 - 2.1 100% OPEN AND SHORT TEST
 - 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX
 - 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN
 - 2.4 HDTV-DVD TEST : 4K
3. ALL MATERIALS ARE REACH COMPLIANT.

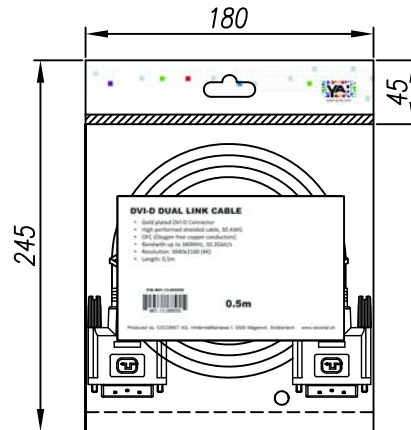

140

DVI-D DUAL LINK CABLE

- Gold plated DVI-D Connector
- High performed shielded cable, 30 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 340MHz, 10.2Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 0.5m

P/N: M01.13.000050

0.5m

Produced by: CECONET AG, Hintermättistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE
	1:1	1 OF 1	Peter	31/05/2017
.X	REV.		CHECKED BY	DATE
.XX	A			
ANGLES	MATERIAL		THIRD ANGLE PROJECTION	
	-			

DVI-D DUAL LINK CABLE
male to male, black, 0.5M

PART NO.	DWG NO.
M01.13.000050	-

