


NOTES:

1. MATERIAL
  - 1.1 HDMI CABLE: (7/0.10BC\*1P+7/0.10BC+AM)\*7PCS+7/0.12BC\*3C +7/0.12BC\*1P+AM+7/0.12BC+128/0.12ALM+PVC BLACK JACKET  
OD:  $\phi 7.3 \pm 0.2$  mm  
CABLE MARKING: VW-1 DVI CABLE 80° 30V
  - 1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS  
GOLD PLATED SHELL.
  - 1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
  - 1.4 ALL HOOD: MOLDED BLACK PVC.
2. ELECTRICAL
  - 2.1 100% OPEN AND SHORT TEST
  - 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX
  - 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN
  - 2.4 HDTV-DVD TEST : 4K
3. ALL MATERIALS ARE REACH COMPLIANT.

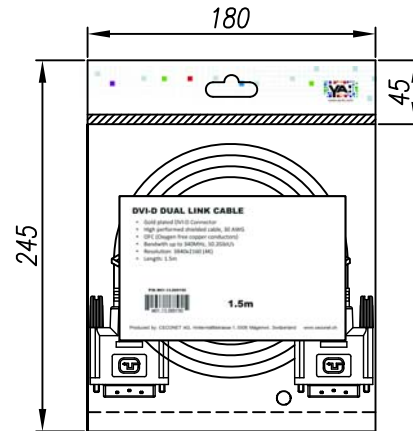

140

### DVI-D DUAL LINK CABLE

- Gold plated DVI-D Connector
- High performed shielded cable, 30 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 340MHz, 10.2Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 1.5m

P/N: M01.13.000150

1.5m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland [www.ceconet.ch](http://www.ceconet.ch)

LABEL

TOLERANCE	SCALE 1 : 1	SHEEL 1 OF 1	DRAWN BY Peter	DATE 14/07/2017
.X	REV. A		CHECKED BY	DATE
.XX	MATERIAL		THIRD ANGLE PROJECTION	
ANGLES	-			

**DVI-D DUAL LINK CABLE**  
male to male, black, 1.5M

PART NO. M01.13.000150	DWG NO. -
---------------------------	--------------

