


NOTES:

- MATERIAL
  - HDMI CABLE: (7/0.10BC\*1P+7/0.10BC+AM)\*7PCS+7/0.12BC\*3C +7/0.12BC\*1P+AM+7/0.12BC+128/0.12ALM+PVC BLACK JACKET  
OD:  $\phi 7.3 \pm 0.2$  mm  
CABLE MARKING: VW-1 DVI CABLE 80° 30V
  - DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS  
GOLD PLATED SHELL.
  - THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
  - ALL HOOD: MOLDED BLACK PVC.
- ELECTRICAL
  - 100% OPEN AND SHORT TEST
  - CONDUCTOR RESISTANCE: 5 OHMS MAX
  - INSULATION RESISTANCE: 10 MEGOHMS MIN
  - HDTV-DVD TEST : 4K
- ALL MATERIALS ARE REACH COMPLIANT.

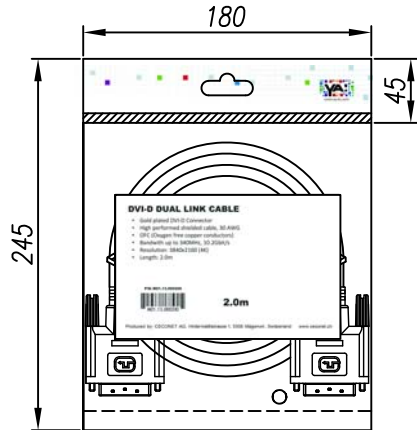

140

**DVI-D DUAL LINK CABLE**

- Gold plated DVI-D Connector
- High performed shielded cable, 30 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 340MHz, 10.2Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 2.0m

P/N: M01.13.000200

2.0m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland [www.ceconet.ch](http://www.ceconet.ch)

90

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1:1	1 OF 1	Peter	31/05/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

<b>DVI-D DUAL LINK CABLE</b>	
male to male, black, 2M	
PART NO.	DWG NO.
M01.13.000200	-

