

NOTES:

1. MATERIAL

1.1 HDMI CABLE: (7/0.10BC*1P+7/0.10BC+AM)*7PCS+7/0.12BC*3C
 +7/0.12BC*1P+AM+7/0.12BC+128/0.12ALM+PVC BLACK JACKET
 OD: $\phi 7.3 \pm 0.2$ mm
 CABLE MARKING: VW-1 DVI CABLE 80° 30V

1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS
 GOLD PLATED SHELL.


1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.

1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST
- 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN
- 2.4 HDTV-DVD TEST : 4K

3. ALL MATERIALS ARE REACH COMPLIANT.

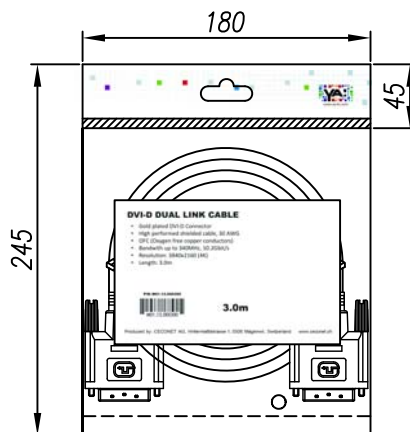

140

DVI-D DUAL LINK CABLE

- Gold plated DVI-D Connector
- High performed shielded cable, 30 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 340MHz, 10.2Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 3.0m

P/N: M01.13.000300

3.0m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1 : 1	1 OF 1	Peter	31/05/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

DVI-D DUAL LINK CABLE
 male to male, black, 3M

PART NO.	DWG NO.
M01.13.000300	-

