

NOTES:

1. MATERIAL

1.1 HDMI CABLE: (7/0.12BC*1P+7/0.12BC+AM)*7PCS+7/0.12BC*3C+7/0.12BC*1P+AM+7/0.12BC+128/0.12ALM+PVC BLACK JACKET
 OD: $\varnothing 8.6 \pm 0.2 \text{ mm}$
 CABLE MARKING: VW-1 DVI CABLE 80° 30V

1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS
 GOLD PLATED SHELL.

1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.

1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL



2.1 100% OPEN AND SHORT TEST

2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX

2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN

2.4 HDTV-DVD TEST : 1080P

3. ALL MATERIALS ARE REACH COMPLIANT.

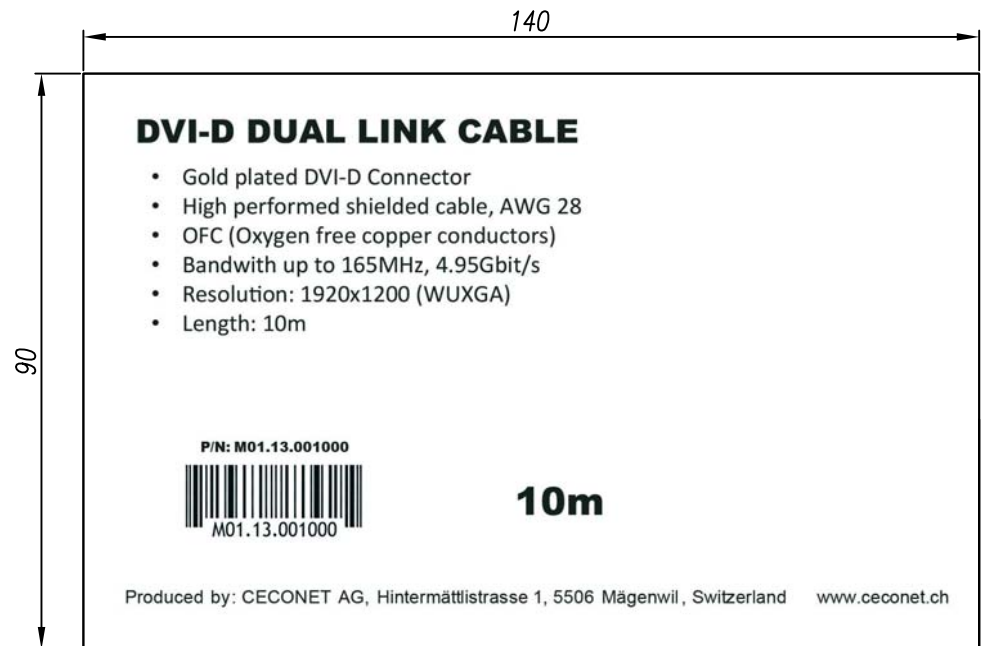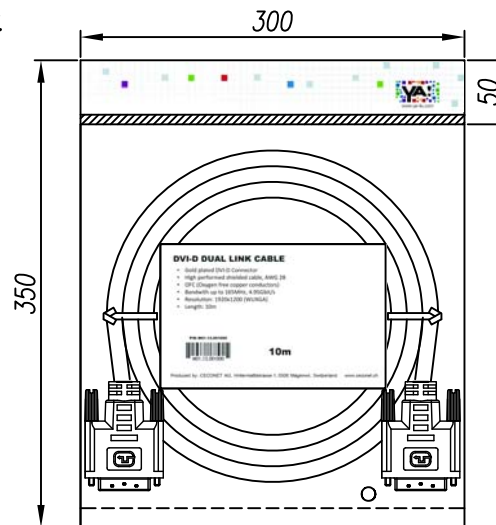

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1 : 1	1 OF 1	Peter	31/05/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

DVI-D DUAL LINK CABLE
 male to male, black, 10M

PART NO.	DWG NO.
M01.13.001000	-

