

NOTES:

1. MATERIAL

- 1.1 HDMI CABLE: (7/0.16BC*1P+7/0.16BC+AM)*7PCS+7/0.16BC*3C+7/0.16BC*1P+AM+7/0.16BC+128/0.12ALM+PVC BLACK JACKET
OD: $\varnothing 9.8 \pm 0.2$ mm
CABLE MARKING: VW-1 DVI CABLE 80° 30V

- 1.2 DVI(24+1) MALE TO MALE: BLACK INSULATION, GOLD PLATED CONTACTS
GOLD PLATED SHELL.


- 1.3 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.

- 1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST
- 2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN
- 2.4 HDTV-DVD TEST : 1080I

3. ALL MATERIALS ARE REACH COMPLIANT.

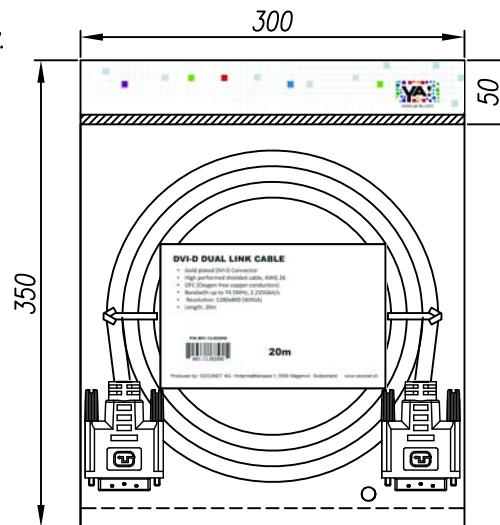

140

DVI-D DUAL LINK CABLE

- Gold plated DVI-D Connector
- High performed shielded cable, AWG 26
- OFC (Oxygen free copper conductors)
- Bandwith up to 74.5MHz, 2.235Gbit/s
- Resolution: 1280x800 (WXGA)
- Length: 20m

P/N: M01.13.002000

20m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
	1 : 1	1 OF 1	Peter	31/05/2017
.X	REV.		CHECKED BY	DATE
.XX	A			
ANGLES	MATERIAL		THIRD ANGLE PROJECTION	
	-			

DVI-D DUAL LINK CABLE	
male to male, black, 20M	
PART NO.	DWG NO.
M01.13.002000	-

