


**NOTES:**

1. MATERIAL
  - 1.1 HDMI CABLE:  $\{(7/0.10BC*1P+7/0.10BC+AM)*4PCS+7/0.10BC*1P+7/0.10BC*3C+AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET.$   
OD:  $\phi 6.0 \pm 0.2$  mm  
CABLE MARKING: VW-1 DVI CABLE 80° 30V
  - 1.2 HDMI 19PIN TYPE A MALE: BLACK INSULATION, GOLD PLATED CONTACTS ,GOLD PLATED SHELL.
  - 1.3 DVI(18+1) MALE: BLACK INSULATION, GOLD PLATED CONTACTS ,GOLD PLATED SHELL.
  - 1.4 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
  - 1.5 ALL HOOD: MOLDED BLACK PVC.
2. ELECTRICAL
  - 2.1 100% OPEN AND SHORT TEST.
  - 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
  - 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
  - 2.4 HDTV-DVD TEST : 1080P
3. ALL MATERIALS ARE REACHCOMPLIANT.

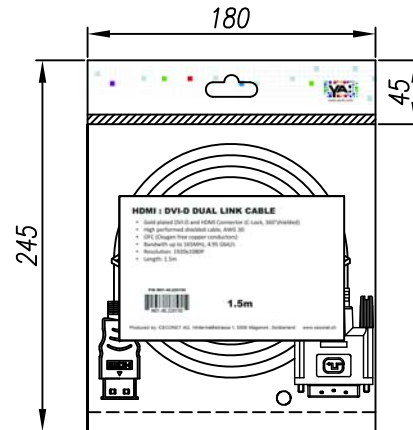

140

HDMI : DVI-D DUAL LINK CABLE

- Gold plated DVI-D and HDMI Connector (C-Lock, 360°shielded)
- High performed shielded cable, AWG 30
- OFC (Oxygen free copper conductors)
- Bandwith up to 165MHz, 4.95 Gbit/s
- Resolution: 1920x1080P
- Length: 1.5m

P/N: M01.40.220150

1.5m

Produced by: CECONET AG, Hintermättistrasse 1, 5506 Mägenwil, Switzerland [www.ceconet.ch](http://www.ceconet.ch)

LABEL

TOLERANCE	SCALE 1 : 1	SHEEL 1 OF 1	DRAWN BY Peter	DATE 14/07/2017
.X	REV. A		CHECKED BY	DATE
.XX	MATERIAL		THIRD ANGLE PROJECTION	
ANGLES	-			

HDMI : DVI-D DUAL LINK CABLE

male to male, black, 1.5M, C-Lock

PART NO. M01.40.220150	DWG NO. -
---------------------------	--------------

