


NOTES:

- MATERIAL**
 - CABLE: {[(7/0.10BC*1P+7/0.10BC+AM)*4PCS+7/0.10BC*1P +7/0.10BC*3C+AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET. OD: $\varnothing 6.0 \pm 0.2$ mm
 - HDMI 19PIN TYPE A MALE:BLACK INSULATION, GOLD PLATED CONTACTS , GOLD PLATED SHELL.
 - DVI (18+1) MALE:BLACK INSULATION, GOLD PLATED CONTACTS , GOLD PLATED SHELL.
 - ALL HOOD:MOLDED BLACK PVC.
- ELECTRICAL**
 - 100% OPEN AND SHORT TEST.
 - CONDUCTOR RESISTANCE: 5 OHMS MAX.
 - INSULATION RESISTANCE: 10 MEGOHMS MIN.
 - HDTV-DVD TEST : 1080P
- PACKAGING:** A PC/PE-BAG PACKAGING.
- ALL MATERIALS ARE ROHS COMPLIANT.

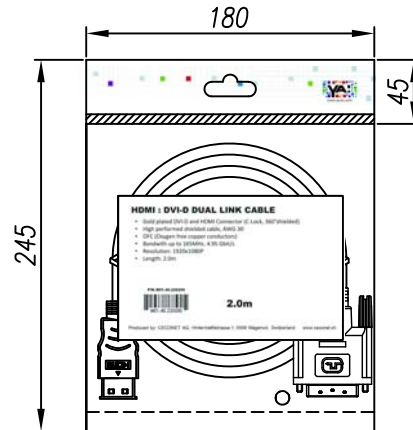

140

HDMI : DVI-D DUAL LINK CABLE

- Gold plated DVI-D and HDMI Connector (C-Lock, 360°shielded)
- High performed shielded cable, AWG 30
- OFC (Oxygen free copper conductors)
- Bandwith up to 165MHz, 4.95 Gbit/s
- Resolution: 1920x1080P
- Length: 2.0m

P/N: M01.40.220200

2.0m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

| | | | | |
|-----------|----------|--------|------------------------|------------|
| TOLERANCE | SCALE | SHEEL | DRAWN BY | DATE |
| .X | 1 : 1 | 1 OF 1 | Peter | 13/04/2017 |
| .XX | REV. | A | CHECKED BY | DATE |
| ANGLES | MATERIAL | - | THIRD ANGLE PROJECTION | |

HDMI : DVI-D DUAL LINK CABLE
male to male, black, 2M, C-Lock

| | |
|---------------|---------|
| PART NO. | DWG NO. |
| M01.40.220200 | - |

