


**NOTES:**

- MATERIAL**
  - CABLE:** {[ (7/0. 10BC\*1P+7/0. 10BC+AM)\*4PCS+7/0. 10BC\*1P +7/0. 10BC\*3C+AM+7/0. 12BC+128/0. 12ALM+BLACK PVC JACKET. OD:  $\varnothing 6.0 \pm 0.2$  mm
  - HDMI 19PIN TYPE A MALE:** BLACK INSULATION, GOLD PLATED CONTACTS , GOLD PLATED SHELL.
  - DVI (18+1) MALE:** BLACK INSULATION, GOLD PLATED CONTACTS , GOLD PLATED SHELL.
  - ALL HOOD:** MOLDED BLACK PVC.
- ELECTRICAL**
  - 100% OPEN AND SHORT TEST.
  - CONDUCTOR RESISTANCE: 5 OHMS MAX.
  - INSULATION RESISTANCE: 10 MEGOHMS MIN.
  - HDTV-DVD TEST : 1080P
- PACKAGING:** A PC/PE-BAG PACKAGING.
- ALL MATERIALS ARE ROHS COMPLIANT.**

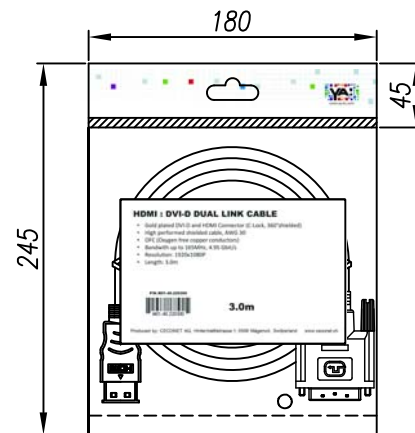

140

**HDMI : DVI-D DUAL LINK CABLE**

- Gold plated DVI-D and HDMI Connector (C-Lock, 360°shielded)
- High performed shielded cable, AWG 30
- OFC (Oxygen free copper conductors)
- Bandwith up to 165MHz, 4.95 Gbit/s
- Resolution: 1920x1080P
- Length: 3.0m

P/N: M01.40.220300

3.0m

Produced by: CECONET AG, Hintermättistrasse 1, 5506 Mägenwil, Switzerland [www.ceconet.ch](http://www.ceconet.ch)

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
	1 : 1	1 OF 1	Peter	13/04/2017
.X	REV.		CHECKED BY	DATE
.XX	A			
ANGLES	MATERIAL		THIRD ANGLE PROJECTION	

**HDMI : DVI-D DUAL LINK CABLE**  
male to male, black, 3M, C-Lock

PART NO.	DWG NO.
M01.40.220300	-

