


NOTES:

1. MATERIAL

- 1.1 HDMI CABLE: {[(7/0.12BC*1P+7/0.12BC+AM)*4PCS+7/0.12BC*1P +7/0.12BC*3C+AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET. OD: $\phi 7.3 \pm 0.2$ mm CABLE MARKING: VW-1 DVI CABLE 80° 30V
- 1.2 HDMI 19PIN TYPE A MALE: BLACK INSULATION, GOLD PLATED CONTACTS ,GOLD PLATED SHELL.
- 1.3 DVI(18+1) MALE: BLACK INSULATION, GOLD PLATED CONTACTS ,GOLD PLATED SHELL.
- 1.4 THUMB SCREW TO BE MOLDED BLACK PVC. NICKEL PLATED SCREW.
- 1.5 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

- 2.1 100% OPEN AND SHORT TEST.
- 2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
- 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
- 2.4 HDTV-DVD TEST : 1080P
- 3. ALL MATERIALS ARE REACH COMPLIANT

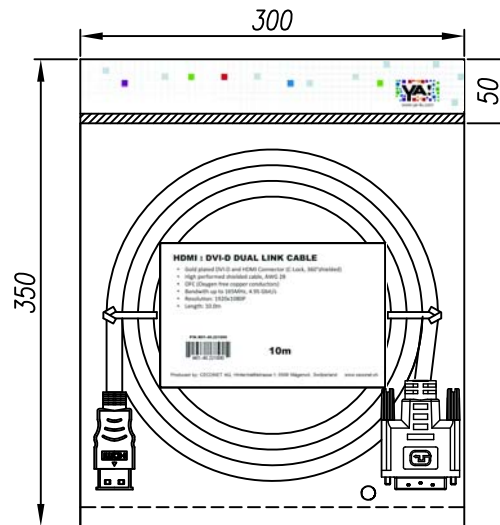

140

HDMI : DVI-D DUAL LINK CABLE

- Gold plated DVI-D and HDMI Connector (C-Lock, 360°shielded)
- High performed shielded cable, AWG 28
- OFC (Oxygen free copper conductors)
- Bandwith up to 165MHz, 4.95 Gbit/s
- Resolution: 1920x1080P
- Length: 10.0m

P/N: M01.40.221000

10m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
	1 : 1	1 OF 1	Peter	31/05/2017
.X	REV.		CHECKED BY	DATE
.XX	A			
ANGLES	MATERIAL		THIRD ANGLE PROJECTION	
	-			

HDMI : DVI-D DUAL LINK CABLE

male to male, black, 10M, C-Lock

PART NO.	DWG NO.
M01.40.221000	-

