

NOTES:

1. MATERIAL

1.1 CABLE: (7/0.1BC*1P+7/0.1BC+AM)*5PCS+7/0.12BC*4C+AM+7/0.12BC+128/0.12ALM+PVC7.3+BLACK PVC JACKET.
 OD: $\varnothing 7.3 \pm 0.2$ mm


1.2 DP MALE: GOLD PLATED CONTACTS, GOLD PLATED SHELL
 1.3 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST.
 2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX.
 2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN*
 2.4 HDTV-DVD TEST : 4K

3. PACKAGING: A PC/PE-BAG.

4. ALL MATERIALS ARE RoHS COMPLIANT.

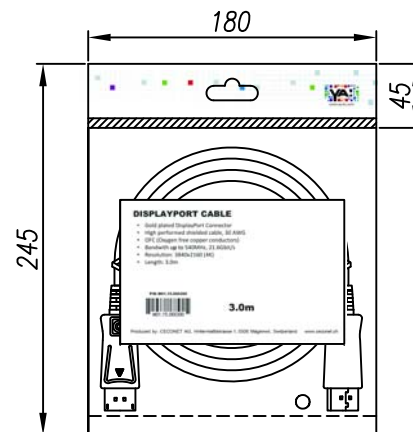

140

DISPLAYPORT CABLE

- Gold plated DisplayPort Connector
- High performed shielded cable, 30 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 540MHz, 21.6Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 3.0m

P/N: M01.15.000300

3.0m

Produced by: CECONET AG, Hintermättlistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1:1	1 OF 1	Peter	14/07/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

DISPLAYPORT CABLE
 male to male, black, 3M

PART NO.	DWG NO.
M01.15.000300	-

