


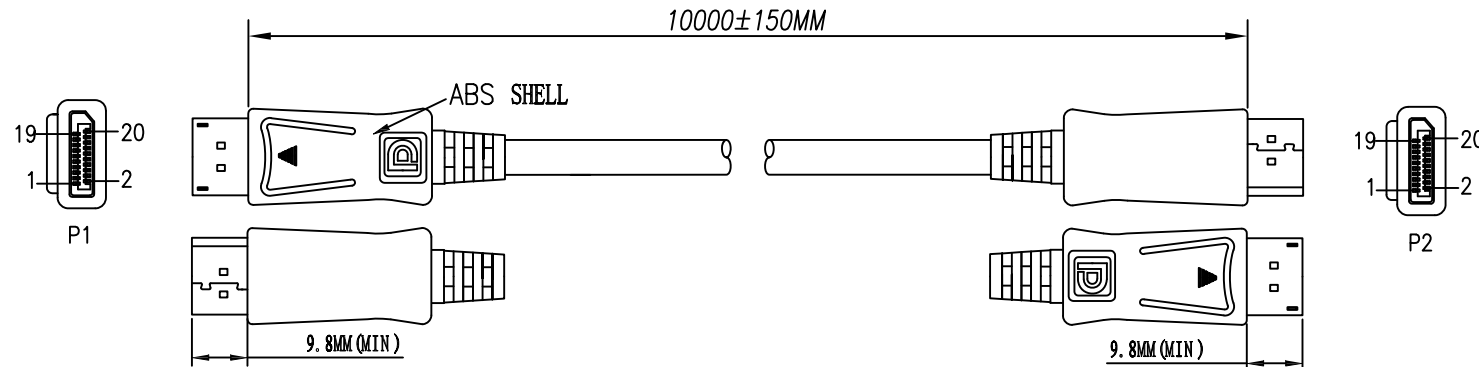

PIN OUT

1	12
3	10
2	11
4	9
6	7
5	8
7	6
9	4
8	5
10	3
12	1
11	2
13	13
14	14
15	15
17	17
16	16
18	18
19	19

SHELL DRAIN SHELL

NOTES:

1. MATERIAL

1.1 CABLE: (7/0.1BC*1P+7/0.1BC+AM)*5PCS+7/0.12BC*4C+AM+7/0.12BC
+128/0.12ALM+PVC7.3+BLACK PVC JACKET.

OD: $\varnothing 7.3 \pm 0.2 \text{ mm}$

1.2 DP MALE: GOLD PLATED CONTACTS, GOLD PLATED SHELL

1.3 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST.



2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX.

2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN

2.4 HDTV-DVD TEST : 4K

3. PACKAGING: A PC/PE-BAG.

4. ALL MATERIALS ARE RoHS COMPLIANT.

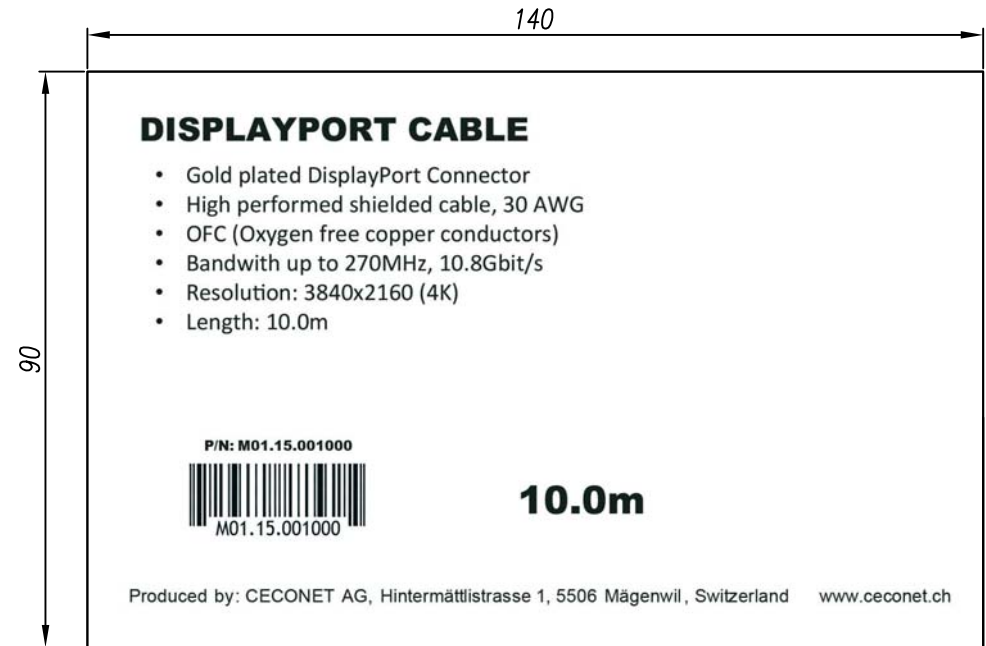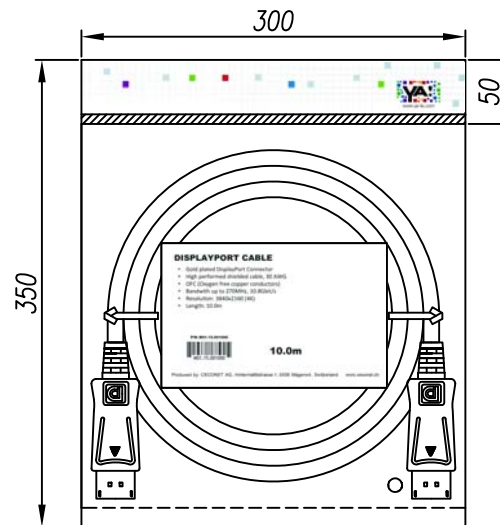

LABEL

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE	DISPLAYPORT CABLE male to male, black, 10M		CECONET SWITZERLAND	
.X	1:1	1 OF 1	Peter	13/04/2017				
.XX	REV.	A	CHECKED BY	DATE	PART NO.	DWG NO.		
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION		M01.15.001000	-		