


NOTE:
 1. Electrical properties:
 1.1 Tested by (quantum data) 780E handhold test
 Instrument for DP1.1
 480P, 720P, 1080P, 4K*2K/30HZ PASS
 1.2 100%PC test PASS
 2. ROHS 2.0 and REACH

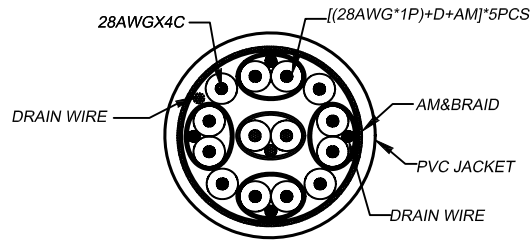

PRINTING: DisplayPort E324703 AWM STYLE 20276 80 30V VW-1


PIN OUT

P1	P2
1	12
3	10
2	11
4	9
6	7
5	8
7	6
9	4
8	5
10	3
12	1
11	2
13	13
14	14
15	15
17	17
16	16
18	18
19	19
SHELL	BRAID
	SHELL

DISPLAYPORT CABLE

- Gold plated DisplayPort Connector
- High performed shielded cable, 28 AWG
- OFC (Oxygen free copper conductors)
- Bandwith up to 270MHz, 10.8Gbit/s
- Resolution: 3840x2160 (4K)
- Length: 15.0m

P/N: M01.15.001500




15.0m

Produced by: CECONET AG, Hintermättistrasse 1, 5506 Mägenwil, Switzerland www.ceconet.ch

MATERIAL LIST

⑤	DUST COVER	PE, COLOR: TRANSPARENT	2
④	CABLE	[(28AWG*1P)+D+AM]*5PCS+28AWGX4C+AM+ALMG+PVC OD: 7.3±0.1MM COLOR: BLACK	L
③	OUTED MOLD	BLACK ABS	2
②	INNER MOLD	LD-PE	2
①	CONNECTOR	DISPLAYPORT MALE, GOLD PLATED PIN, GOLD PLATED SHELL	2
No.	PART NAME	DESCRIPTION	QTY

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1:1	1 OF 1	Peter	25/08/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

DISPLAYPORT CABLE	
male to male, black, 15M	
PART NO.	DWG NO.
M01.15.001500	-

