



WIRING

P1	P2
1	2
2	3
3	1
4	10
5	11
6	9
7	18
8	19
9	17
10	23
11	22
12	24
15	6
16	7
17	15
18	14
19	16
SHELL	SHELL

- ⑤ 45P PVC COLOR:BLACK
- ④ PE white diaphanous
- ③ Electronic wire
- ② DVI(24+1) male gold plating
- ① HDMI female gold plating

Electrical tests:

1. 100% open and short test.
2. Conductor resistance:5 OHM.
3. Insulation resistance:5M OHM AT 300V DC.

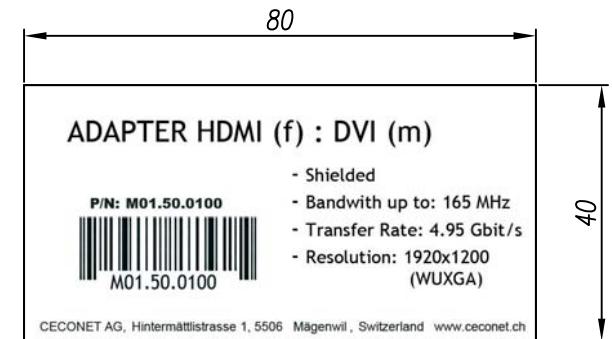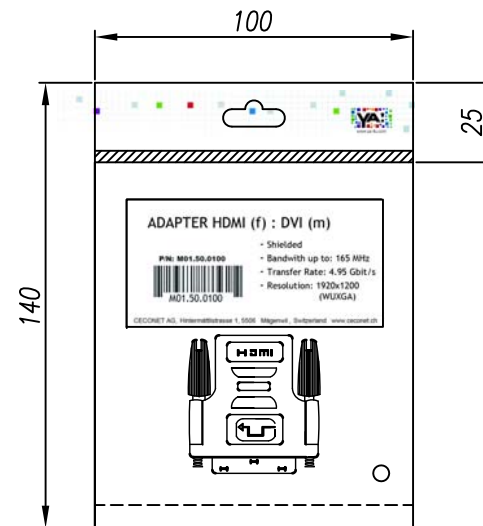

LABEL

TOLERANCE	SCALE	SHEEL	DRAWN BY	DATE
.X	1 : 1	1 OF 1	Peter	18/05/2017
.XX	REV.	A	CHECKED BY	DATE
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION	

HDMI (f) : DVI (m), Adapter shielded, WUXGA

PART NO. M01.50.0100

DWG NO. -

