



WIRING

| P1    | P2    |
|-------|-------|
| 2     | 1     |
| 3     | 2     |
| 1     | 3     |
| 10    | 4     |
| 11    | 5     |
| 9     | 6     |
| 18    | 7     |
| 19    | 8     |
| 17    | 9     |
| 23    | 10    |
| 22    | 11    |
| 24    | 12    |
| 6     | 15    |
| 7     | 16    |
| 15    | 17    |
| 14    | 18    |
| 16    | 19    |
| SHELL | SHELL |

- ⑤ 45P PVC COLOR:BLACK
- ④ PE white diaphanous
- ③ Electronic wire
- ② HDMI male gold plating
- ① DVI(24+5) female gold plating

Electrical tests:

1. 100% open and short test.
2. Conductor resistance:5 OHM.
3. Insuation resistance:5M OHM AT 300V DC.

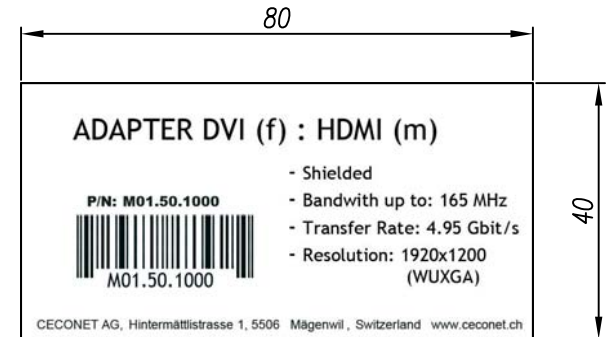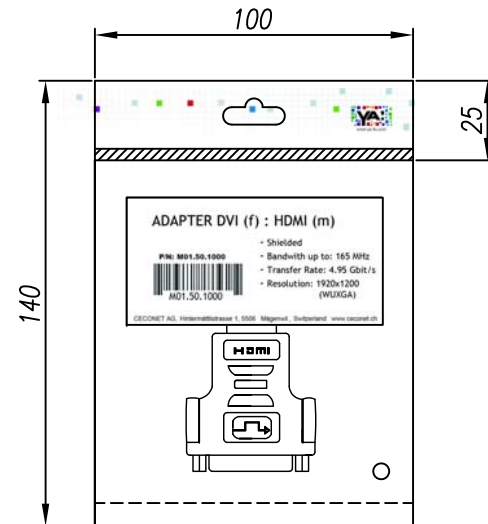

LABEL

|           |          |             |            |            |
|-----------|----------|-------------|------------|------------|
| TOLERANCE | SCALE    | SHEEL       | DRAWN BY   | DATE       |
|           | 1 : 1    | 1 OF 1      | Peter      | 18/05/2017 |
| .X        | REV.     |             | CHECKED BY | DATE       |
| .XX       | A        |             |            |            |
| ANGLES    | MATERIAL | THIRD ANGLE | PROJECTION |            |
|           | -        |             |            |            |

DVI (f) : HDMI (m), Adapter  
shielded, WUXGA

PART NO. M01.50.1000      DWG NO. -

