



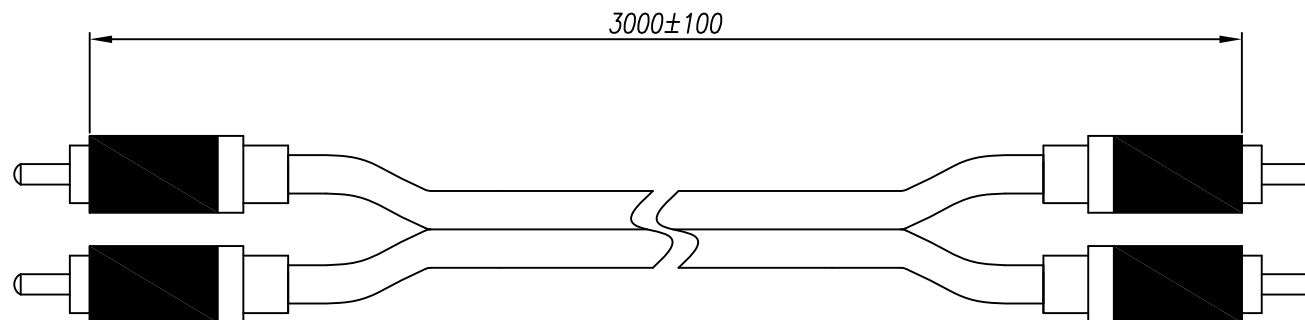

WIRING DIAGRAM


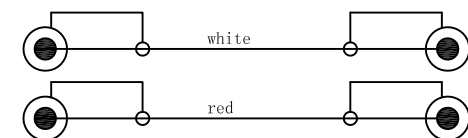


RCA Male

RCA Male

NOTES:

1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. CONDUCTION RESISTANCE: 5 OHM MAX
3. INSULATION RESISTANCE: 10 OHM MAX
4. WITHSTAND VOLTAGE: 300V
5. 100% RoHS COMPLIANT.

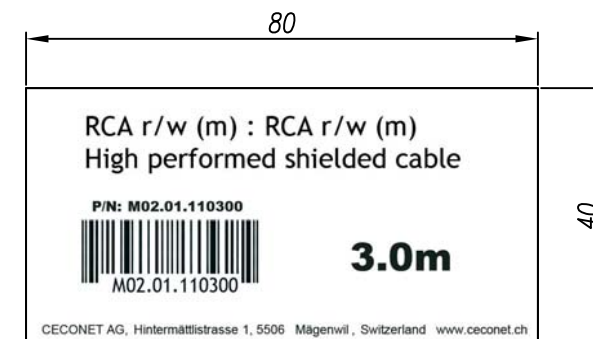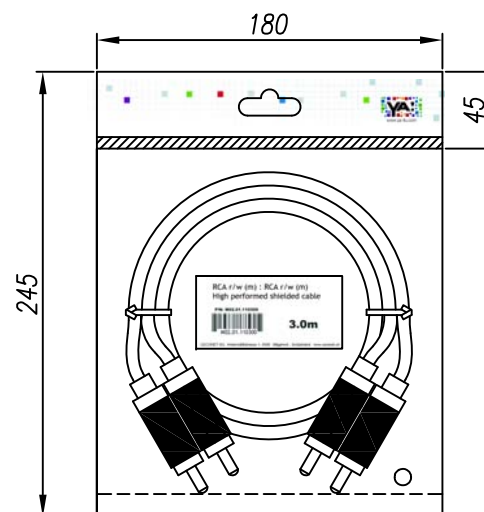

LABEL

TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	2x RCA to 2x RCA, cable male to male, 3M		 SWITZERLAND	
.X		1 : 1	1 OF 1	Peter	12/05/2017				
.XX		REV.		CHECKED BY	DATE				
ANGLES		MATERIAL		THIRD ANGLE PROJECTION		PART NO.	DWG NO.		
		-				M02.01.110300	-		