
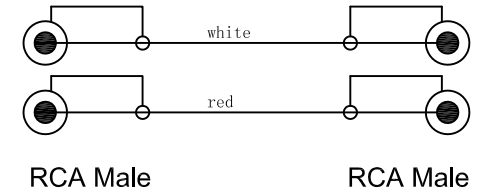
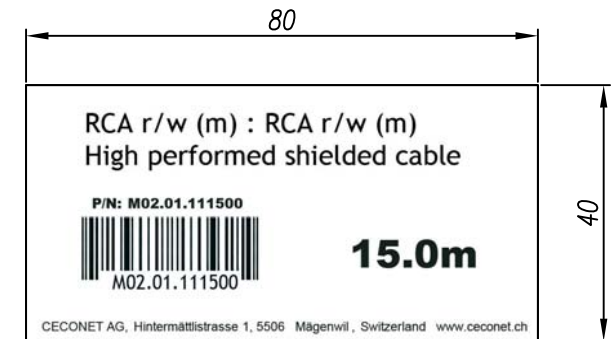


WIRING DIAGRAM





NOTES:

1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. CONDUCTION RESISTANCE:5 OHM MAX
3. INSULATION RESISTANCE:10 OHM MAX
4. WITHSTAND VOLTAGE:300V
5. 100% RoHS COMPLIANT.

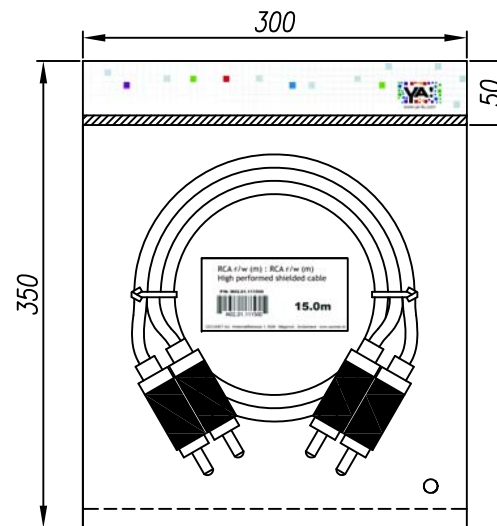

LABEL

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE	2x RCA to 2x RCA, cable male to male, 15M	 SWITZERLAND		
	.X	1 : 1	1 OF 1	Peter			14/07/2017	
.XX	REV.	A	CHECKED BY	DATE			PART NO.	DWG NO.
ANGLES	MATERIAL	-	THIRD ANGLE PROJECTION				M02.01.111500	-