
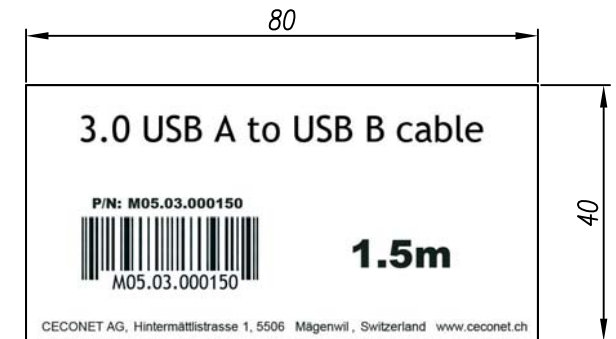


NOTES:

1. MATERIALS
  - 1.1 CABLE: 28AWG  
OD=5.5±0.15MM.  
CABLE PRINTING: USB 3.0 SUPER SPEED CABLE
  - 1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
  - 1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
  - 1.4 ALL HOOD: MOULDED BLUE (3005C) PVC.
2. ELECTRICAL  
100% OPEN AND SHORT TEST.
3. PACKING: IPC/PE BAG.
4. ALL MATERIAL BE ROHS COMPLIANT.

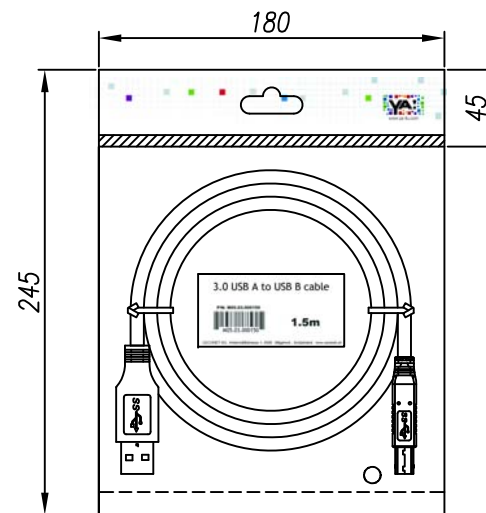

LABEL

|           |          |       |                        |       |   |  |               |         |
|-----------|----------|-------|------------------------|-------|---|--|---------------|---------|
| TOLERANCE | SCALE    | SHEEL | DRAWN BY               | DATE  | 3.0 USB A to USB B, cable<br>male to male, 1.5M |  |               |         |
|           | .X       | 1 : 1 | 1 OF 1                 | Peter |   |  | 12/05/2017    |         |
| .XX       | REV.     | A     | CHECKED BY             | DATE  |   |  | PART NO.      | DWG NO. |
| ANGLES    | MATERIAL | -     | THIRD ANGLE PROJECTION |       |   |  | M05.03.000150 | -       |