

NOTES:

1. MATERIALS

1.1 CABLE: 28AWG

OD=5.5±0.15MM.

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.



1.4 ALL HOOD: MOULDED BLUE (3005C) PVC.

2. ELECTRICAL

100% OPEN AND SHORT TEST.

3. PACKING: IPC/PE BAG.

4. ALL MATERIAL BE ROHS COMPLIANT.

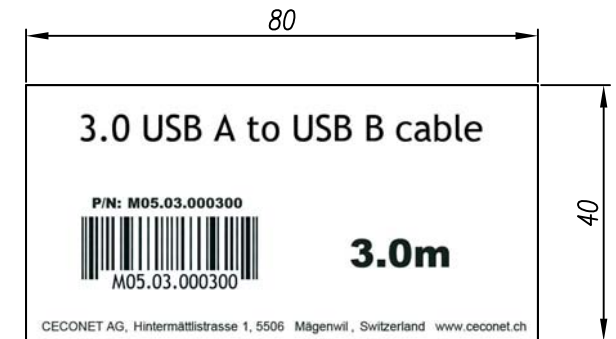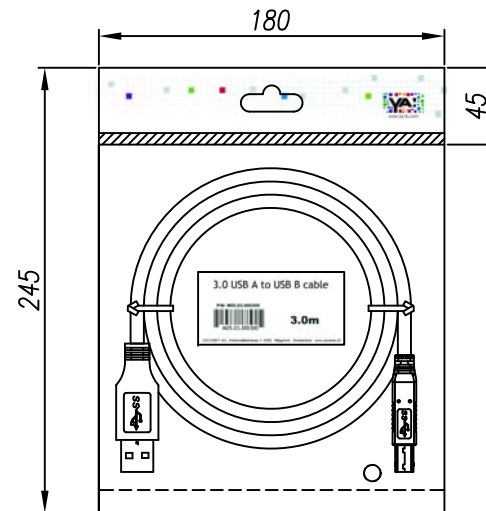

LABEL

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE
.X	1:1	1 OF 1	Peter	12/05/2017
.XX	REV.		CHECKED BY	DATE
ANGLES	A			
	MATERIAL		THIRD ANGLE PROJECTION	
	-			

3.0 USB A to USB B, cable
male to male, 3M

PART NO.	DWG NO.
M05.03.000300	-

