

NOTES:

1. MATERIALS

1.1 CABLE: 28AWG

OD=5.5 ± 0.15MM.

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.



1.4 ALL HOOD: MOULDED BLUE (3005C) PVC.

2. ELECTRICAL

100% OPEN AND SHORT TEST.

3. PACKING: IPC/PE BAG.

4. ALL MATERIAL BE ROHS COMPLIANT.

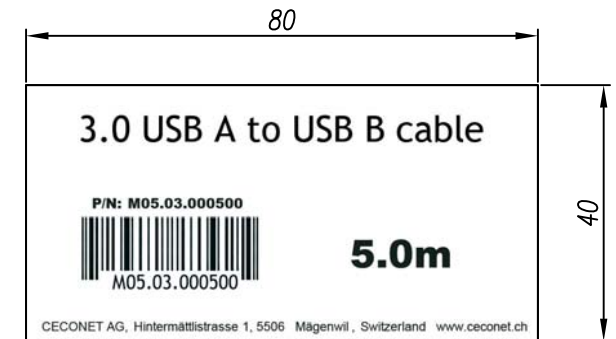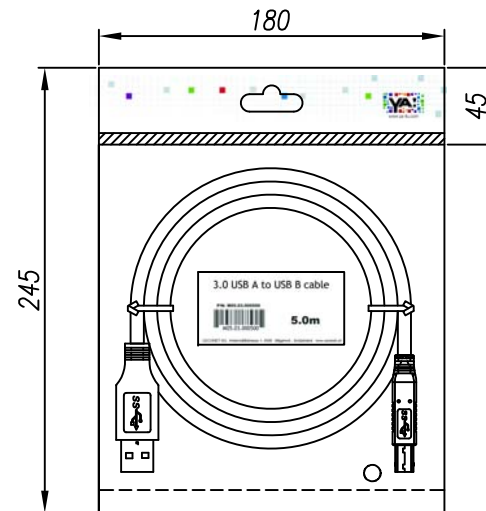

LABEL

| | | | | |
|-----------|----------|--------|------------------------|------------|
| TOLERANCE | SCALE | SHEET | DRAWN BY | DATE |
| .X | 1:1 | 1 OF 1 | Peter | 12/05/2017 |
| .XX | REV. | | CHECKED BY | DATE |
| ANGLES | A | | | |
| | MATERIAL | | THIRD ANGLE PROJECTION | |
| | - | | | |

3.0 USB A to USB B, cable
male to male, 5M

| | |
|---------------|---------|
| PART NO. | DWG NO. |
| M05.03.000500 | - |

