

NOTES:

1. MATERIALS

1.1 CABLE 2.0: 28AWG
OD=4.5 ± 0.15mm.

CABLE MARKING: USB 2.0 CABLE FULLY RATED 30V 80 ° C
1.2 CONNECTOR: P1: USB A TYPE MALE: SOLDER TYPE,
GOLD FLASH CONTACTS, NICKEL PLATED SHELL.



1.3 P2: USB B TYPE MALE: SOLDER TYPE,
GOLD FLASH CONTACTS, NICKEL PLATED SHELL.

1.4 ALL HOOD: MOLDED BLACK PVC.

2. 100% OPEN AND SHORT TEST.

3. PACKING: 1PCS/PE BAG.

4. ALL MATERIAL BE RoHS COMPLIANT.

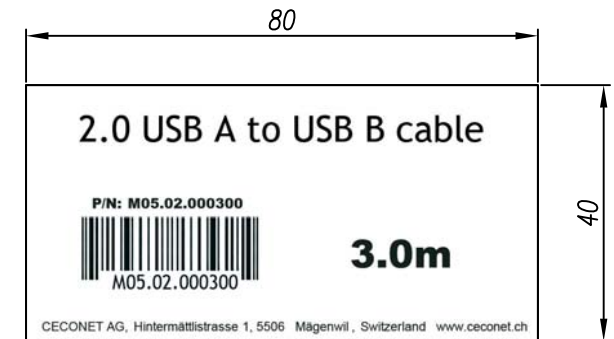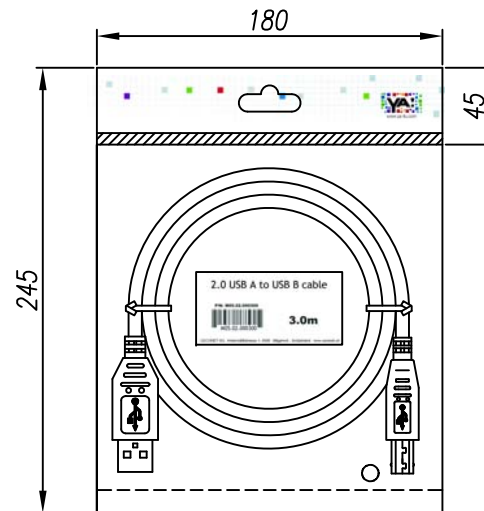

LABEL

| | | | | |
|-----------|----------|--------|------------------------|------------|
| TOLERANCE | SCALE | SHEEL | DRAWN BY | DATE |
| .X | 1:1 | 1 OF 1 | Peter | 12/05/2017 |
| .XX | REV. | A | CHECKED BY | DATE |
| ANGLES | MATERIAL | - | THIRD ANGLE PROJECTION | |

2.0 USB A to USB B, cable
male to male, 3M

| | |
|---------------|---------|
| PART NO. | DWG NO. |
| M05.02.000300 | - |

