
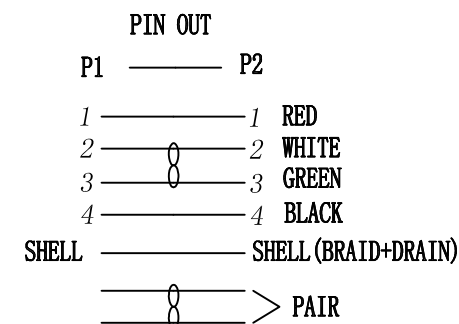


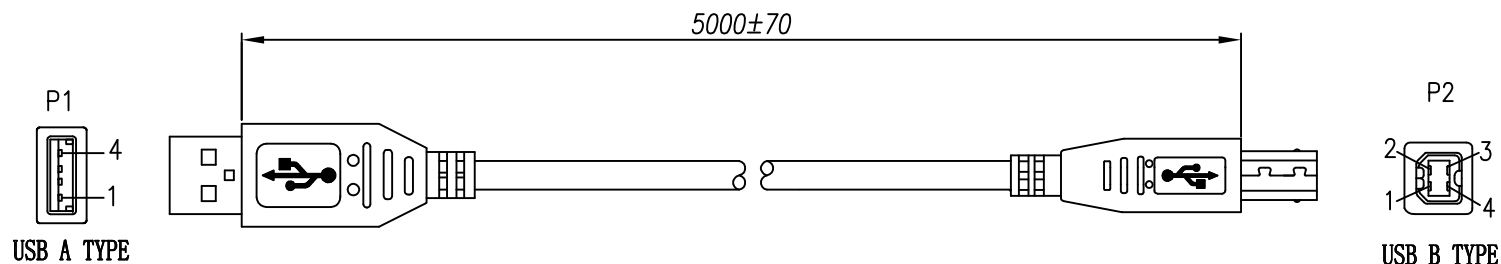

NOTES:

1. MATERIALS

1.1 CABLE 2.0: 28AWG
 $OD=4.5 \pm 0.15$ mm.

CABLE MARKING: USB 2.0 CABLE FULLY RATED 30V 80 ° C
 1.2 CONNECTOR: P1: USB A TYPE MALE: SOLDER TYPE,
 GOLD FLASH CONTACTS, NICKEL PLATED SHELL.



1.3 P2: USB B TYPE MALE: SOLDER TYPE,
 GOLD FLASH CONTACTS, NICKEL PLATED SHELL.

1.4 ALL HOOD: MOLDED BLACK PVC.


2. 100% OPEN AND SHORT TEST.

3. PACKING: 1PCS/PE BAG.

4. ALL MATERIAL BE RoHS COMPLIANT.

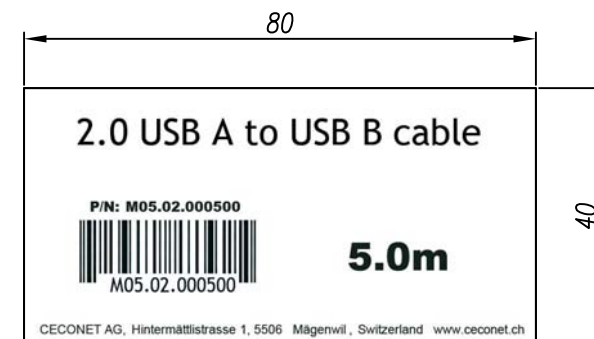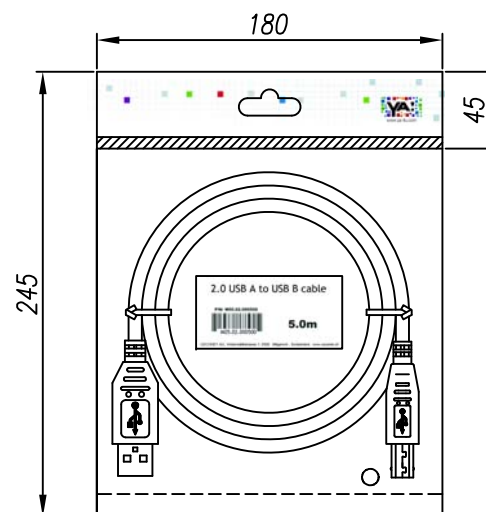

LABEL

TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	2.0 USB A to USB B, cable male to male, 5M		 SWITZERLAND	
.X		1 : 1	1 OF 1	Peter	12/05/2017				
.XX		REV.		CHECKED BY	DATE				
ANGLES		A				PART NO.	DWG NO.		
		MATERIAL		THIRD ANGLE PROJECTION		M05.02.000500	-		