
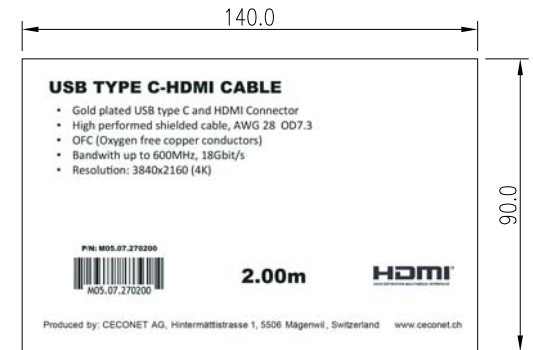


NOTE:

1. Electrical properties:
 - 1.100% Open and Short Test.
 2. Conductor Resistance: 3 OHMS
 3. Insulation Resistance: 10 MEGOHMS
 4. HI-POT: DC200V/0.01S
 5. PC Test 4K*2K 60Hz Pass 1080P Pass
1. ROHS 2.0 and REACH

MATERIAL LIST

8	packing	YA bag (245*180mm)	1
7	cable	(7/0.1BC*1P+7/0.1BC+AM)*5pcs+7/0.12BC*4C+AM+7/0.12BC+128/0.12AL-MG+PVC, OD: 7.3±0.1mm, Color: Black	L2
6	cable	(1/0.2BC*1P+AM)*5pcs+1/0.2BC*4C+7/0.16BC*1C+AM+7/0.16BC+96/0.12AL-MG+PVC, OD: 5.0±0.1mm, Color: Black	L1
5	outer mold	Black ABS	1
4	outer mold	Black ABS	1
3	outer mold	Black PVC	1
2	connector	HDMI Male, Gold Plated Pin, Gold Plated Shell	1
1	connector	USB3.1 type C Male, Gold Plated Shell	1
NO.	part name	DESCRIPTION	QTY

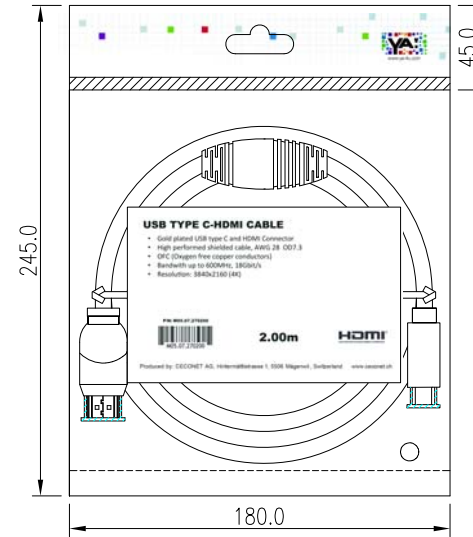

LABEL (1:2)

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE
.X ±0.25	1 : 1	1 OF 1	Kevin	18/01/2018
.XX ±0.10	REV.		CHECKED BY	DATE
ANGLES ±0.5°	A.01			
	MATERIAL		THIRD ANGLE PROJECTION	
	-			

USB type C-HDMI Cable	
2.0M	
PART NO.	DWG NO.
M05.07.270200	-

