
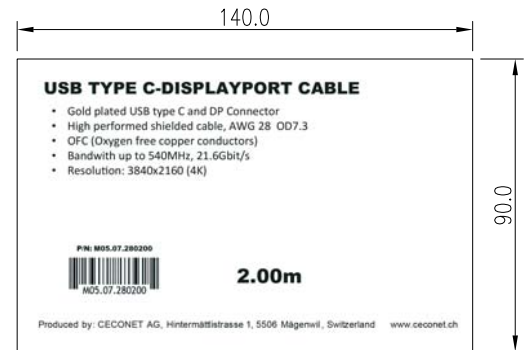


- NOTE:**
- Electrical properties:
    - 100% Open and Short Test.
    - Conductor Resistance:3 OHMS
    - Insulation Resistance:10 MEGOHMS
    - HI-POT:DC200V/0.01S
    - PC Test 4K\*2K 60Hz Pass 1080P Pass
  - ROHS 2.0 and REACH

**MATERIAL LIST**

8	packing	YA bag (245*180mm)	1
7	cable	(7/0.1BC*1P+7/0.1BC+AM)*5pcs+7/0.12BC*4C+AM+7/0.12BC+128/0.12AL-MG+PVC,OD:7.3±0.1mm,Color:Black	L2
6	cable	(1/0.2BC*1P+AM)*5pcs+1/0.2BC*4C+7/0.16BC*1C+AM+7/0.16BC+96/0.12AL-MG+PVC,OD:5.0±0.1mm,Color:Black	L1
5	outer mold	Black ABS	1
4	outer mold	Black ABS	1
3	outer mold	Black PVC	1
2	connector	DP Male,Gold Plated Pin,Gold Plated Shell	1
1	connector	USB3.1 type C Male,Gold Plated Shell	1
NO.	part name	DESCRIPTION	QTY

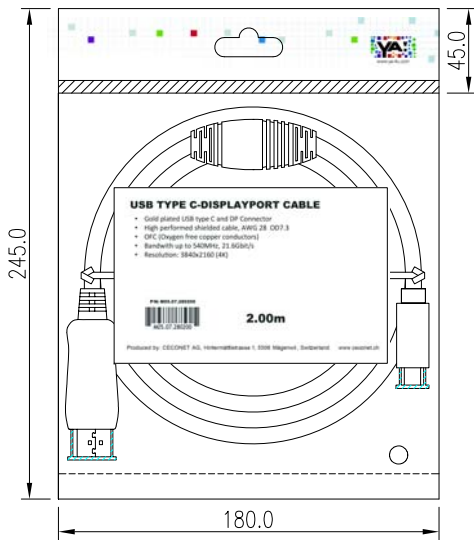

TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE
.X	±0.25	1 : 1	1 OF 1	Kevin	18/01/2018
		REV.		CHECKED BY	DATE
.XX	±0.10	A.01			
		MATERIAL		THIRD ANGLE PROJECTION	
ANGLES	±0.5°	-			

**USB type C-DISPLAYPORT Cable**  
**2.0M**

PART NO.	DWG NO.
M05.07.280200	-

