
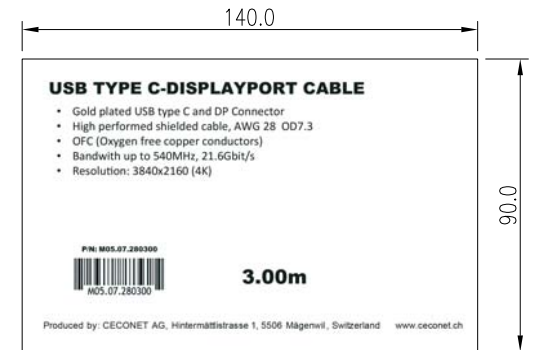


NOTE:

- Electrical properties:
 - 100% Open and Short Test.
 - Conductor Resistance: 3 OHMS
 - Insulation Resistance: 10 MEGOHMS
 - HI-POT: DC200V/0.01S
 - PC Test 4K*2K 60Hz Pass 1080P Pass
- ROHS 2.0 and REACH

MATERIAL LIST

8	packing	YA bag (245*180mm)	1
7	cable	(7/0.1BC*1P+7/0.1BC+AM)*5pcs+7/0.12BC*4C+AM+7/0.12BC+128/0.12AL-MG+PVC,OD:7.3±0.1mm,Color:Black	L2
6	cable	(1/0.2BC*1P+AM)*5pcs+1/0.2BC*4C+7/0.16BC*1C+AM+7/0.16BC+96/0.12AL-MG+PVC,OD:5.0±0.1mm,Color:Black	L1
5	outer mold	Black ABS	1
4	outer mold	Black ABS	1
3	outer mold	Black PVC	1
2	connector	DP Male, Gold Plated Pin, Gold Plated Shell	1
1	connector	USB3.1 type C Male, Gold Plated Shell	1
NO.	part name	DESCRIPTION	QTY

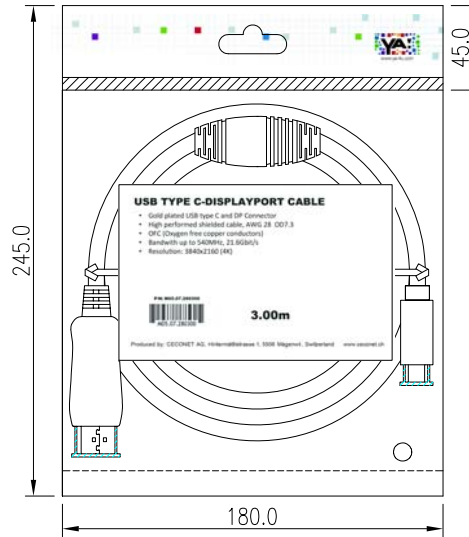

LABEL (1:2)

TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE
.X	±0.25	1 : 1	1 OF 1	Kevin	18/01/2018
		REV.		CHECKED BY	DATE
.XX	±0.10	A.01			
		MATERIAL		THIRD ANGLE PROJECTION	
ANGLES	±0.5°	-			

USB type C-DISPLAYPORT Cable
3.0M

PART NO.	DWG NO.
M05.07.280300	-

