


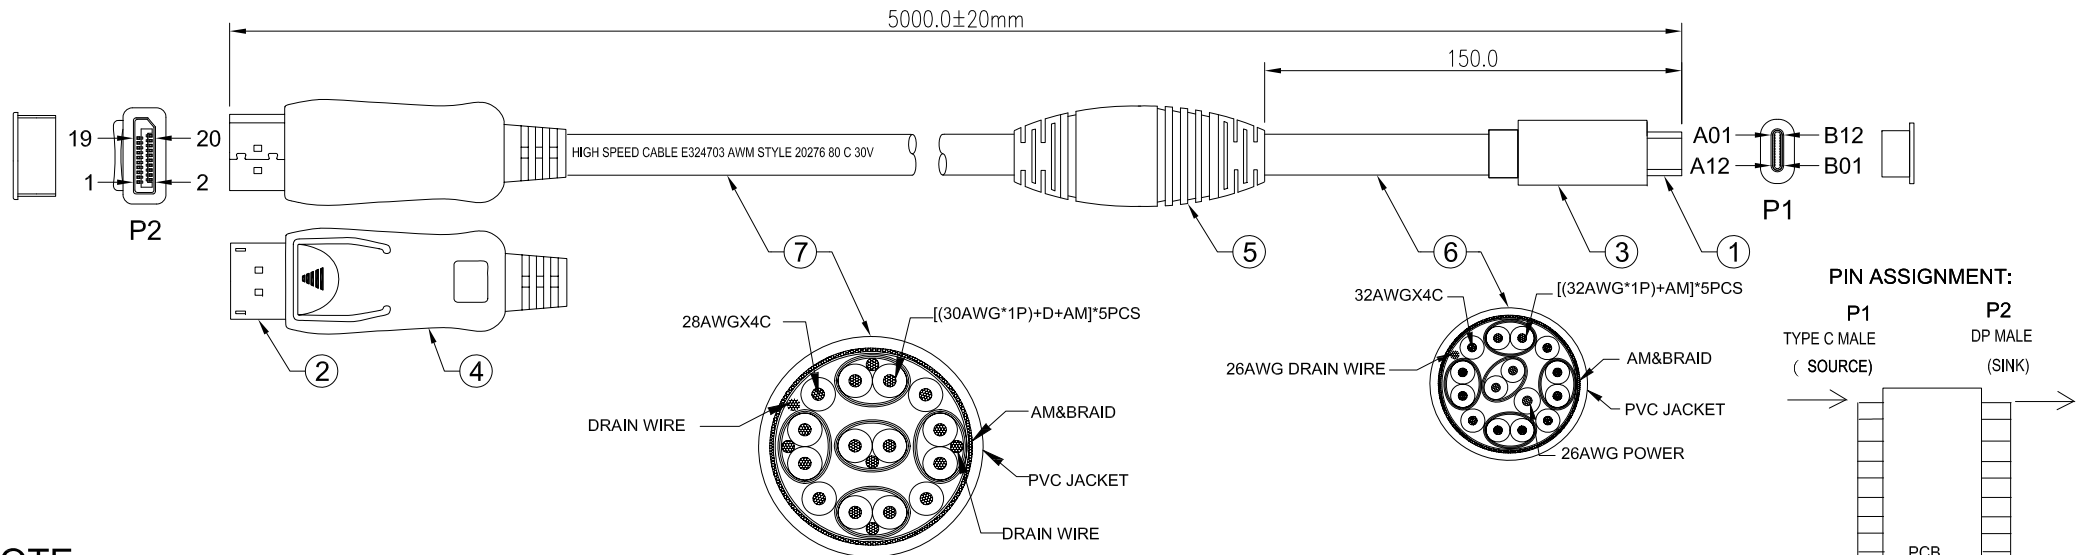

NOTE:



1. Electrical properties:

- 100% Open and Short Test.
- Conductor Resistance: 3 OHMS
- Insulation Resistance: 10 MEGOHMS
- HI-POT: DC200V/0.01S
- PC Test 4K*2K 60Hz Pass 1080P Pass

1. ROHS 2.0 and REACH

MATERIAL LIST

NO.	part name	DESCRIPTION	QTY
8	packing	YA bag (245*180mm)	1
7	cable	(7/0.1BC*1P+7/0.1BC+AM)*5pcs+7/0.12BC*4C+AM+7/0.12BC+128/0.12AL-MG+PVC, OD: 7.3±0.1mm, Color: Black	L2
6	cable	(1/0.2BC*1P+AM)*5pcs+1/0.2BC*4C+7/0.16BC*1C+AM+7/0.16BC+96/0.12AL-MG+PVC, OD: 5.0±0.1mm, Color: Black	L1
5	outer mold	Black ABS	1
4	outer mold	Black ABS	1
3	outer mold	Black PVC	1
2	connector	DP Male, Gold Plated Pin, Gold Plated Shell	1
1	connector	USB3.1 type C Male, Gold Plated Shell	1

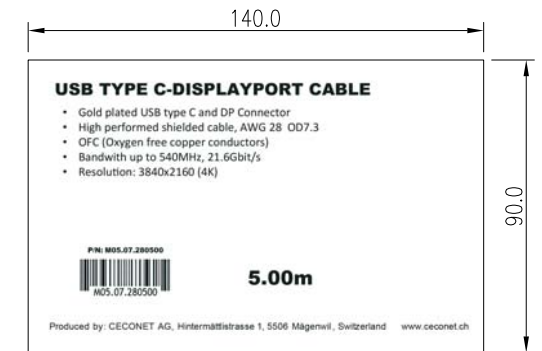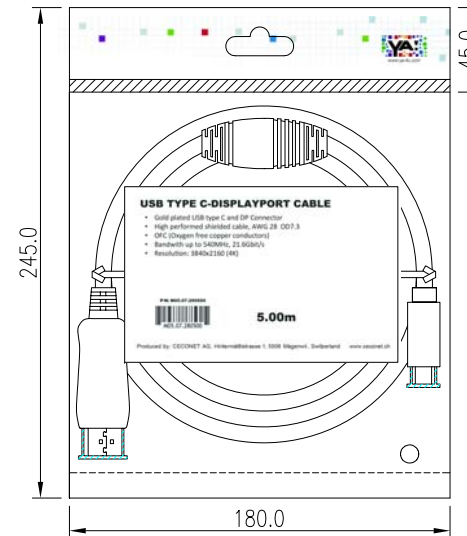

LABEL (1:2)

TOLERANCE	SCALE	SHEET	DRAWN BY	DATE
.X	±0.25	1 : 1	Kevin	18/01/2018
.XX	±0.10	REV. A.01	CHECKED BY	DATE
ANGLES	±0.5°	MATERIAL -	THIRD ANGLE PROJECTION	

USB type C-DISPLAYPORT Cable

5.0M

PART NO.
M05.07.280500

DWG NO.

-

CECONET

SWITZERLAND