

PT01_LCAS_0000_A209E_02.0_B0

Description

Single pigtail, LC-HQ BTW, APC, fiber 0.9 mm_02.0m_yellow, SM G.657.A2



Features

- High mechanical stability
- Colour coded boot for good visibility also in mated condition

Technical Data

General Data

Description	Values
General Type	LC pigtail
Operation temperature	-40 up to 85°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

Connector left


Description	Values
Connector type	LC pigtail
Polish	APC
Color Housing	Black
Color Boot	Green
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	B
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	65
Durability	1000

Cable

Description	Values
Cable type	Simplex Cable
Fiber count	1
Fiber	1 x 0.9 mm
Fiber type	E9/125-SM G.657.A2

PT01_LCAS_0000_A209E_02.0_B0

Technical Drawing

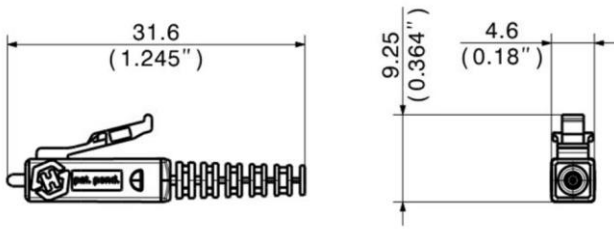

Ordering information

Meter (m)	Item number	Description
2	-----	PT01_LCAS_0000_A209E_02.0_B0