


PT02_LCAS_0000_A228T_xx_S0

Description

Pigtail set of 2, LC-HQ BTW, APC, fiber 0.9mm_XX.X_yellow, SM G.657.A2

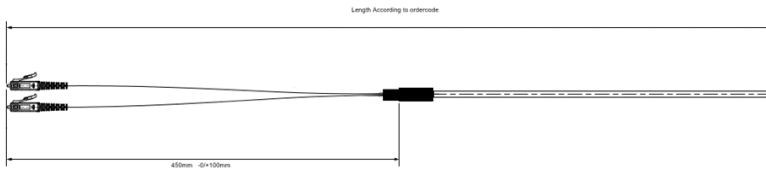

Features

- High mechanical stability
- Colour coded boot for good visibility also in mated condition

Technical Data

General Data

Description	Values
General Typ	LC pigtail
Operation temperature	-40 up to 85°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes


Connector left

Description	Values
Connector typ	LC pigtail
Polish	APC
Color Housing	Black
Color Boot	Green
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	65
Durability	1000
Performance class H+S	0

Cable

Description	Values
Cable typ	Semi-tight Tube
Fiber count	2
Fiber	2 x 0.6 mm
Fiber typ	E9/125-SM G.657.A2

Technical Drawing

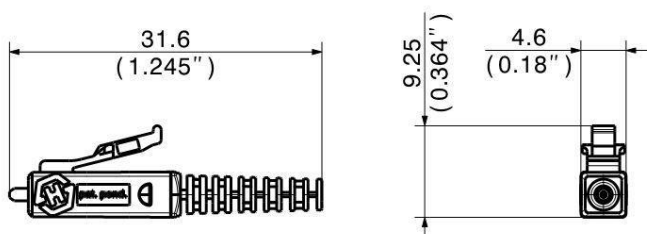

PT04_LCAS_0000_A228T_xx_S0

Ordering information


Meter (m)	Item number	Description
10	85164707	PT02_LCAS_0000_A228T_10.0_S0
20	85164708	PT02_LCAS_0000_A228T_20.0_S0
30	85164709	PT02_LCAS_0000_A228T_30.0_S0
40	85164710	PT02_LCAS_0000_A228T_40.0_S0
50	85164711	PT02_LCAS_0000_A228T_50.0_S0
60	85164712	PT02_LCAS_0000_A228T_60.0_S0
70	85164713	PT02_LCAS_0000_A228T_70.0_S0
80	85164714	PT02_LCAS_0000_A228T_80.0_S0
90	85164715	PT02_LCAS_0000_A228T_90.0_S0
100	85164716	PT02_LCAS_0000_A228T_0100_S0
110	85164717	PT02_LCAS_0000_A228T_0110_S0
120	85164718	PT02_LCAS_0000_A228T_0120_S0
130	85164719	PT02_LCAS_0000_A228T_0130_S0
140	85164720	PT02_LCAS_0000_A228T_0140_S0
150	85164721	PT02_LCAS_0000_A228T_0150_S0

Packaging

One single reel will be put into a single polybag:

-2.8mm from 10mtr to 100mtr

Cable Reel size: Ø240x Ø160x70mm
PE bag: 300x400mm for every cable reel



-2.8mm from 101mtr to 200mtr

Cable Reel size: Ø240x Ø160x150mm
PE bag: 400x500mm for every cable reel

