


## PT04\_LCAS\_0000\_A228T\_xx\_S0

### Description

Pigtail set of 4, LC-HQ BTW, APC, fiber 0.9mm\_XX.X\_yellow, SM G.657.A2

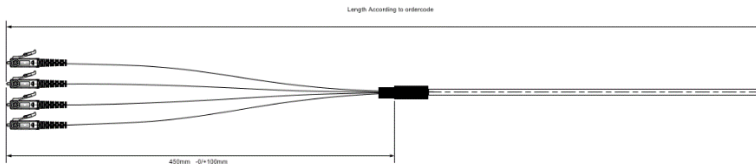

### Features

- High mechanical stability
- Colour coded boot for good visibility also in mated condition

### Technical Data

#### General Data

Description	Values
General Typ	LC pigtail
Operation temperature	-40 up to 85°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes


#### Connector left

Description	Values
Connector typ	LC pigtail
Polish	APC
Color Housing	Black
Color Boot	Green
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	65
Durability	1000
Performance class H+S	0

#### Cable

Description	Values
Cable typ	Semi-tight Tube
Fiber count	4
Fiber	4 x 0.6 mm
Fiber typ	E9/125-SM G.657.A2

### Technical Drawing

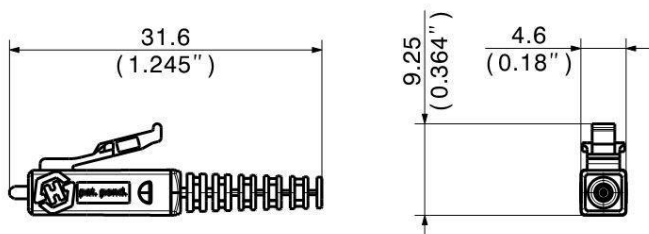

## PT04\_LCAS\_0000\_A228T\_xx\_S0

### Ordering information

Meter (m)	Item number	Description
10	85164692	PT04_LCAS_0000_A228T_10.0_S0
20	85164693	PT04_LCAS_0000_A228T_20.0_S0
30	85164694	PT04_LCAS_0000_A228T_30.0_S0
40	85164695	PT04_LCAS_0000_A228T_40.0_S0
50	85164696	PT04_LCAS_0000_A228T_50.0_S0
60	85164697	PT04_LCAS_0000_A228T_60.0_S0
70	85164698	PT04_LCAS_0000_A228T_70.0_S0
80	85164699	PT04_LCAS_0000_A228T_80.0_S0
90	85164700	PT04_LCAS_0000_A228T_90.0_S0
100	85164701	PT04_LCAS_0000_A228T_0100_S0
110	85164702	PT04_LCAS_0000_A228T_0110_S0
120	85164703	PT04_LCAS_0000_A228T_0120_S0
130	85164704	PT04_LCAS_0000_A228T_0130_S0
140	85164705	PT04_LCAS_0000_A228T_0140_S0
150	85164706	PT04_LCAS_0000_A228T_0150_S0

### Packaging

One single reel will be put into a single polybag:

-2.8mm from 10mtr to 100mtr

Cable Reel size: Ø240x Ø160x70mm  
PE bag: 300x400mm for every cable reel



-2.8mm from 101mtr to 200mtr

Cable Reel size: Ø240x Ø160x150mm  
PE bag: 400x500mm for every cable reel

