
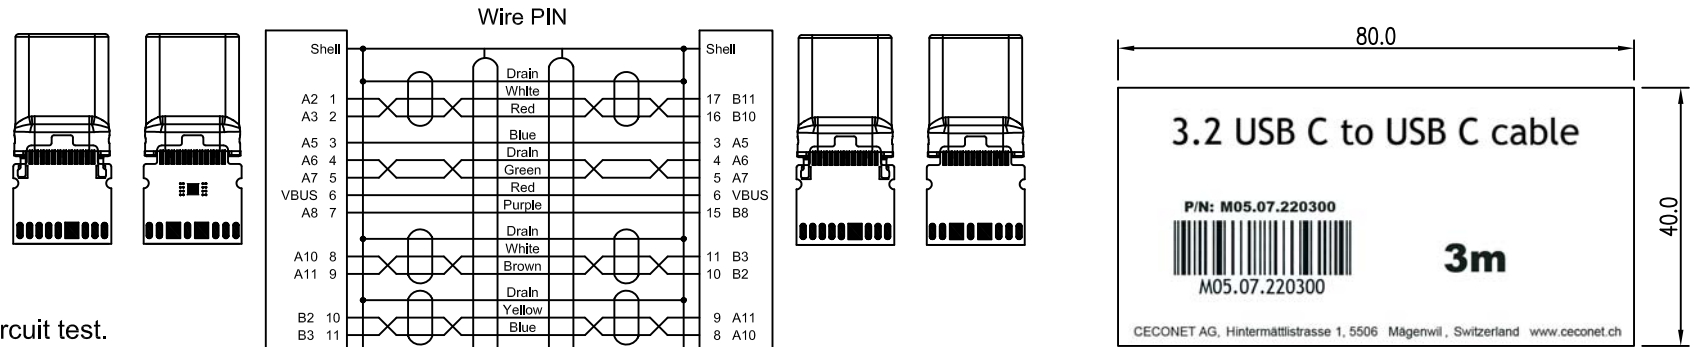


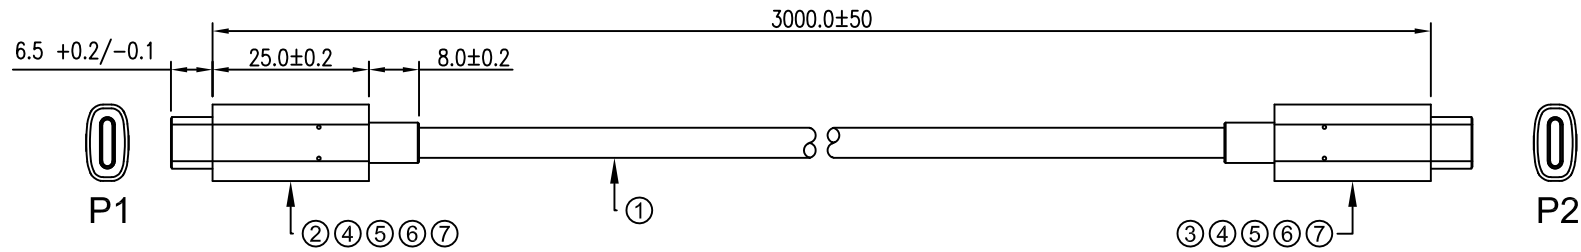

Test Standard:

1. 100% open and short circuit test.
2. Resistance voltage: DC300V/0.01sec
5M ohms(MIN)
3. Withstand voltage: AC300V,/0.1sec

Electronic characteristics:

1. Support 100W, with PD
2. Speed: 20Gbps
3. Support 4K 60Hz (3840*2160 60Hz)

P1
(Chip EJ913D)

P2

7	COPPER	Double side foil tape at SR
6	METAL COVER	Tinplate
5	OVER MOLD	PE (BLACK)
4	INNER MOLD	PVC
3	CONNECTOR	Type-C , Gen2
2	CONNECTOR	Type-C , Gen2 / EJ913D
1	RAW CABEL	(30AWG*1P+D+AL+HM)*4C+(32AWG*1P+AL+HM)*1C+32AWG*4C+23AWG*2C+FOIL 12/11/0.06+12/12/0.06TC , OD: 5.3 , PVC (BLACK) , L=3M
NO.	MATERIAL	SPECIFICATION

TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE
.X		1 : 1	1 OF 1	Kevin	23/08/2023
.XX		REV.		CHECKED BY	DATE
.XX		A			
ANGLES		MATERIAL		THIRD ANGLE PROJECTION	
		-			

3.2 USB C to USB C
3MPART NO.
M05.07.220300DWG NO.
-CECONET
SWITZERLANDPacking:
1pc/Hang cardboard
10pcs/Bag

Hang cardboard