

Note:

Cable OD: 2.7mm,LSZH Jacket, White(RAL 9003),Kevlar; G657A3 fiber


2.LC/APC connector,outer housing is green(PANTONE 347C), boot is white, dust cap is black;

3.LC/APC connector,outer housing is green(PANTONE 347C), boot is white, dust cap is black;

4.Insertion Loss: Max.<0.25dB, Avg.<0.2dB

Return Loss: >= 65dB(APC), >= 50dB(UPC)


5.L=1M

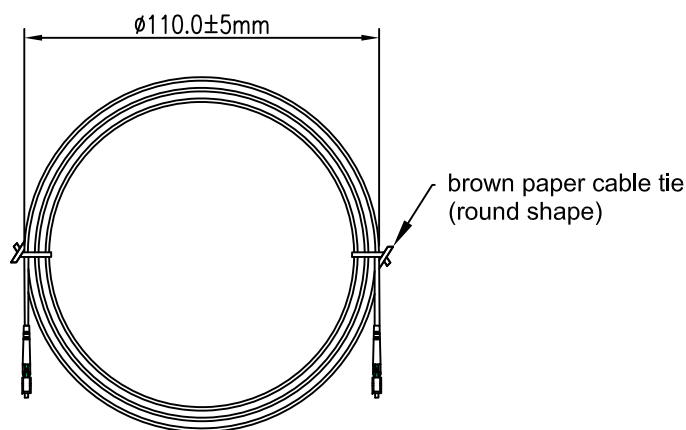


Packing:

1PC/FSC paper Envelope

60PCS/inner box, 240PCS/Ctn

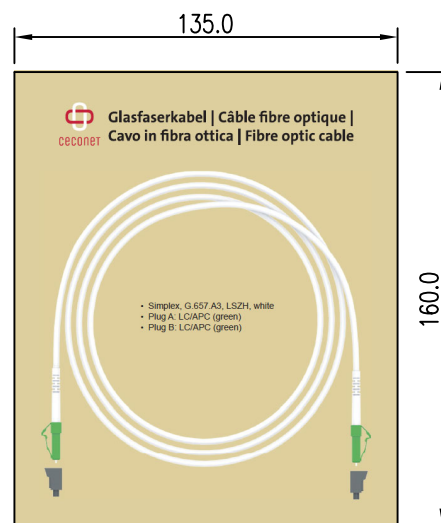

Kraft paper envelope (Front)

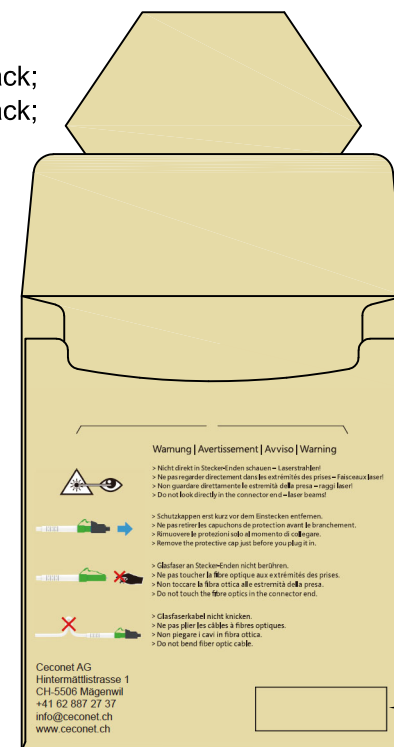

Kraft paper envelope (Back)

P/N: F12.01.01.0010
Length: 1M
Production date: YYMM

Label

Material: FSC 100% Recycled paper
(non-glossy surface)

Color: Brown , Black printing

TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	Fiber Patchkabel LC/APC - LC/APC , 1M		CECONET SWITZERLAND	
.X	±0.25	1 : 1	1 OF 1	Kevin	12/02/2026				
.XX	±0.10	REV.		CHECKED BY	DATE				
ANGLES		MATERIAL		THIRD ANGLE PROJECTION		PART NO.	DWG NO.		
		-				F12.01.01.0010	-		