

RoHS

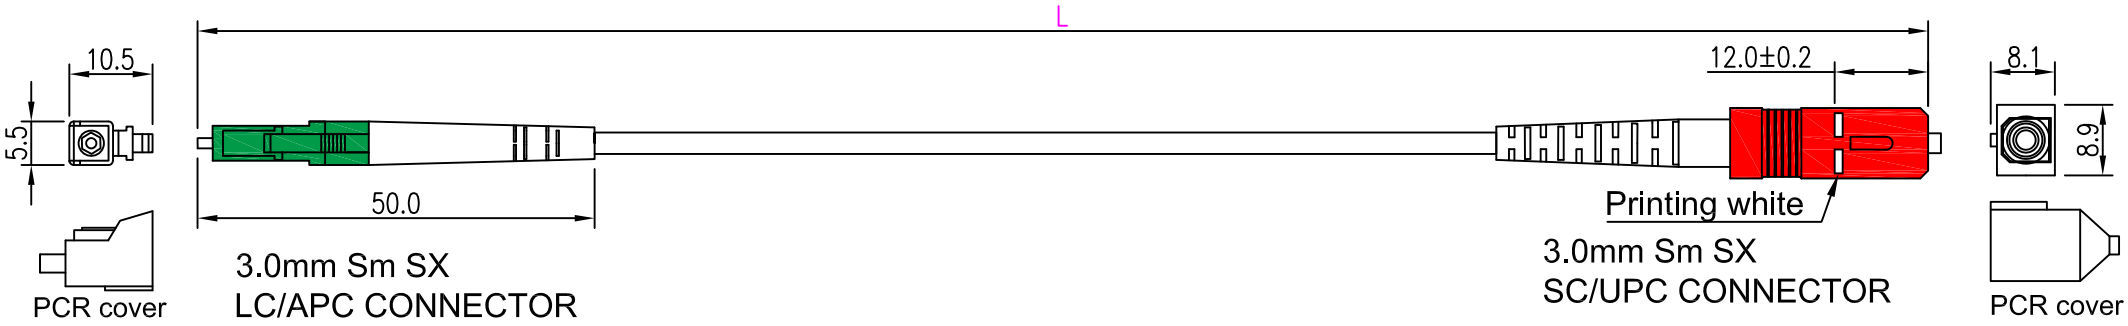

Note:

1.Cable jacket: LSZH (halogen-free, low smoke), white RAL 9003, Ø 2.7 mm, Aramid yarn
2.Connectors: LC/APC (8° angled polish), outer housing is green(PANTONE 347C), boot is white
3.Connectors: SC/UPC, outer housing is red(PANTONE 1795C), boot is white
4.Fibre: single-mode 9/125μm , simplex, to ITU-T G.657.B3, bend radius limit: ≥ 5 mm
(compatible with G.657.A2 and G.652.D)
5.Dust caps: black, made from 65 % post-consumer recycled material (PCR)
6.Insertion loss: max. 0.25 dB, typically < 0.2 dB
7.Return loss: ≥ 65 dB (APC); ≥ 50 dB (UPC)
8.Operating Temperature: -20 °C ~ +70 °C
Storage Temperature: -40 °C ~ +80 °C
9.L=XXM

PART NO.	L	D
F12.01.04.0010	1000±50mm	ø110±5mm
F12.01.04.0025	2500±50mm	ø110±5mm
F12.01.04.0040	4000±50mm	ø110±5mm
F12.01.04.0075	7500±50mm	ø140±5mm
F12.01.04.0100	10000±50mm	ø140±5mm
F12.01.04.0150	15000±100mm	ø180±5mm
F12.01.04.0200	20000±100mm	ø180±5mm
F12.01.04.0250	25000±100mm	ø180±5mm

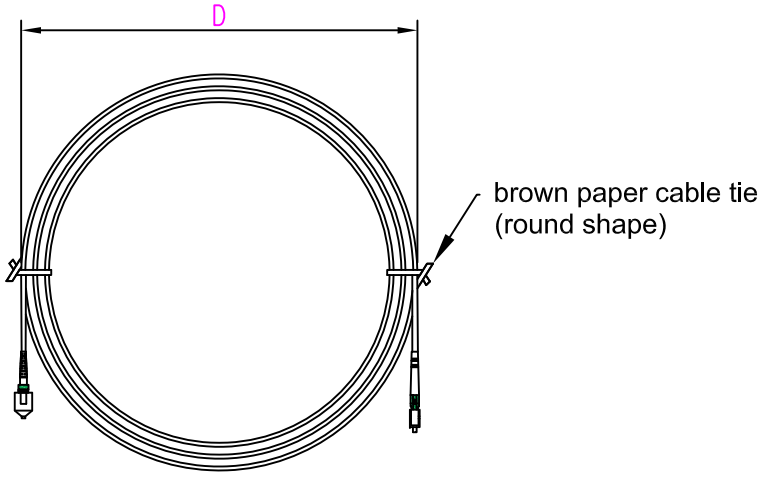


Packing:
1PC/FSC paper Envelope


TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE	Fiber Patchcable LC/APC - SC/UPC	
.X	±0.20	1 : 1	1 OF 1	Kevin	19/11/2026		
.XX	±0.10	REV.		CHECKED BY	DATE		
ANGLES	±0.5°	A					
		MATERIAL		THIRD ANGLE PROJECTION		PART NO.	DWG NO.
		-				F12.01.04.XXXX	-

ceconet

RoHS

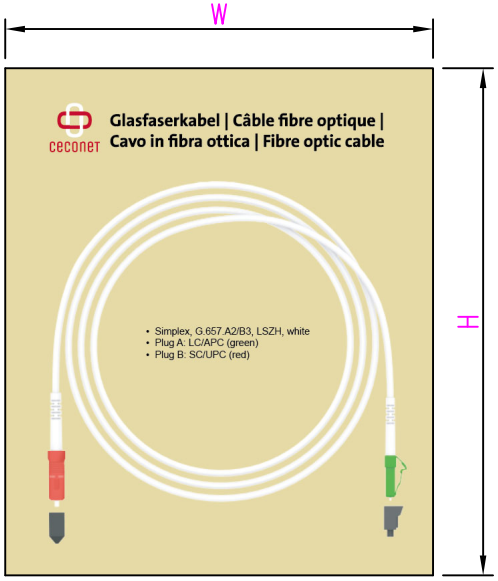

Kraft paper envelope (Front)

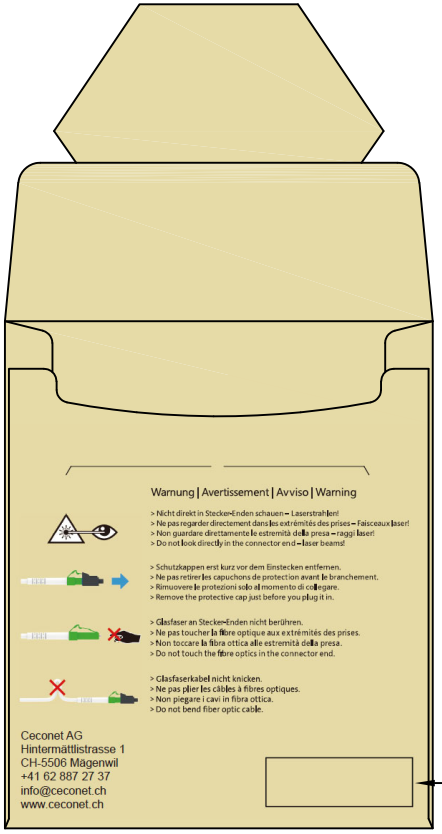


Kraft paper envelope (Back)

Material: FSC Recycled paper
(non-glossy surface)

PACKING/LABEL:

PART NO.(P/N)	LENGTH	PAPER(W*H)	CARTON(PCS)
F12.01.04.0010	1M	135*160mm	140
F12.01.04.0025	2.5M	135*160mm	140
F12.01.04.0040	4M	135*160mm	120
F12.01.04.0075	7.5M	169*190mm	140
F12.01.04.0100	10M	169*190mm	120
F12.01.04.0150	15M	210*235mm	140
F12.01.04.0200	20M	210*235mm	120
F12.01.04.0250	25M	210*235mm	100

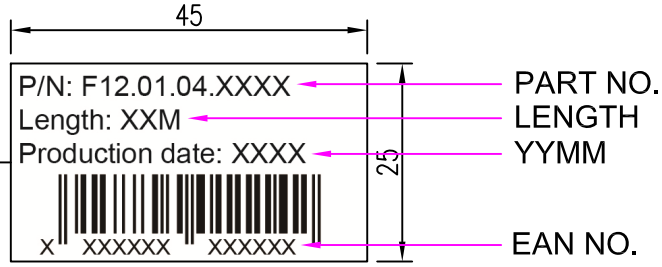

Label
Material: FSC Recycled paper
(non-glossy surface)
Color: Brown，Black printing

TOLERANCE		SCALE	SHEEL	DRAWN BY	DATE	Fiber Patchcable LC/APC - SC/UPC	
.X	±0.20	1 : 1	1 OF 1	Kevin	19/11/2026		
.XX	±0.10	REV.		CHECKED BY	DATE		
ANGLES	±0.5°	A					
		MATERIAL		THIRD ANGLE PROJECTION		PART NO.	DWG NO.
		-				F12.01.04.XXXX	-

ceconet