


TP Link TL-WR702N einrichten als WLAN Adapter für Epson Projektoren

1. Infrastruktur Mode

1.1. Mit WLAN TP-LINK_XXXX verbinden



1.2. Kennwort ist auf der Unterseite des Gerätes zu finden



1.3. Browser öffnen und als URL 192.168.0.254 öffnen



1.4. Anmelden (User:admin PW:admin)

Authentifizierung erforderlich


Für den Server <http://192.168.0.254> ist ein Nutzername und ein Passwort erforderlich. Der Server meldet Folgendes: TP-LINK Wireless N Nano Router WR702N.

Nutzername:

Passwort:

Anmelden Abbrechen

1.5. Quick Setup



1.6. Next

Quick Setup

The quick setup will tell you how to configure the basic network parameters.
To continue, please click the **Next** button.
To exit, please click the **Exit** button.

Exit Next

1.7. Client wählen

Quick Setup - Working Mode

- AP: AP Mode
- Router: Router Mode
- Repeater: Repeater Mode
- Bridge: Bridge Mode
- Client: Client Mode

On this mode, the only wired port works as LAN. Computer could connect to the device by either wired or wireless way.

Back Next

1.8. Suchen des bestehendem WLAN (Survey)

Quick Setup - Wireless Client

SSID:

MAC of AP: Example:00-1D-0F-11-22-33

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

WDS Mode:

(Please choose Main AP's type of encryption, and input the wireless password)

Security Options:

1.9. Bestehendes WLAN Auswählen

AP List

AP count: 13

ID	BSSID	SSID	Signal	Channel	Security	Choose
1	BC-F6-85-72-F0-90	ceconet	85dB	7	WPA/WPA2	Connect
2	66-FA-3E-36-B0-D3	JPC Wi-Free	34dB	6	WPA2	Connect
3	54-FA-3E-36-B0-D3	HZN249335425	31dB	6	WPA2-PSK	Connect
4	D8-5D-E2-0A-02-47	HP-Print-47-Color LaserJet MFP	30dB	6	WPA2-PSK	Connect
5	00-26-42-38-D5-B0	bha-36729	26dB	1	WPA/WPA2	Connect
6	00-D4-12-00-B2-88	gk-16956	25dB	1	WPA/WPA2	Connect
7	FC-75-16-78-08-50	ceconet	16dB	1	WPA/WPA2	Connect
8	C4-14-3C-38-47-A0	sapa	11dB	11	WPA2	Connect
9	C4-14-3C-38-47-A2	sapamobile	10dB	11	WPA2-PSK	Connect
10	C4-14-3C-38-47-A1	sapaguest	10dB	11	OFF	Connect
11	C4-14-3C-38-47-A3		10dB	11	WPA2-PSK	Connect
12	14-49-E0-70-16-19	JPC Wi-Free	3dB	6	WPA2	Connect
13	C-59-E5-F1-8B-53	HP-Print-53-Officejet Pro 8600	2dB	11	WPA2-PSK	Connect

1.10. WLAN Kennwort eingeben

Quick Setup - Wireless Client

SSID:

MAC of AP: Example:00-1D-0F-11-22-33

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

WDS Mode:

(Please choose Main AP's type of encryption, and input the wireless password)


Security Options:

WEP Key Index:


Authentication Type:

PassWord:

1.11. Neustart zum Abschluss

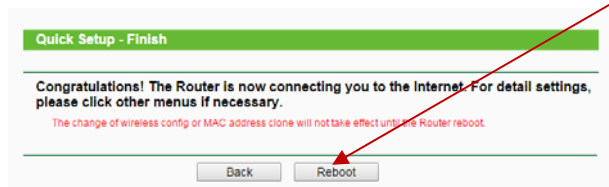

1.12. Notebook mit bestehendem WLAN verbinden



1.13. Netzwerkkabel einstecken

1.14. Verbindung kontrollieren

Menu am Projektor aufrufen -> Netzwerk -> Netzwerkinfo wired LAN