

TP Link TL-WR702N

Instruction pour une utilisation comme adaptateur WLAN pour les projecteurs Epson

1. Mode infrastructure


1.1. Se connecter avec le WLAN TP-LINK_XXXXX



1.2. Le mot de passe se trouve à l'arrière de l'appareil



1.3. Ouvrir un browser internet et taper l'adresse URL 192.168.0.254

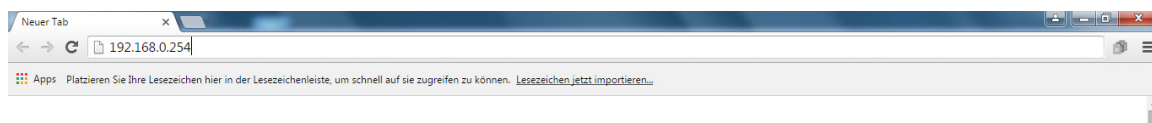

1.4. Login (User:admin PW:admin)

Authentifizierung erforderlich


Für den Server http://192.168.0.254 ist ein Nutzernamen und ein Passwort erforderlich. Der Server meldet Folgendes: TP-LINK Wireless N Nano Router WR702N.

Nutzername:

Passwort:

Anmelden Abbrechen

1.5. Quick Setup



1.6. Next

Quick Setup

The quick setup will tell you how to configure the basic network parameters.
To continue, please click the **Next** button.
To exit, please click the **Exit** button.

Exit Next

1.7. Choisir "Client"

Quick Setup - Working Mode

- AP: AP Mode
- Router: Router Mode
- Repeater: Repeater Mode
- Bridge: Bridge Mode
- Client: Client Mode

On this mode, the only wired port works as LAN. Computer could connect to the device by either wired or wireless way.

Back Next

1.8. Rechercher le WLAN existant (Survey)

Quick Setup - Wireless Client

SSID:

MAC of AP: Example:00-1D-0F-11-22-33

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

WDS Mode:

(Please choose Main AP's type of encryption, and input the wireless password)

Security Options:

1.9. Choisir dans les WLAN existants

AP List

AP count: 13

ID	BSSID	SSID	Signal	Channel	Security	Choose
1	BC-F6-85-72-F0-90	ceconet	55dB	7	WPA/WPA2	Connect
2	56-FA-3E-36-B0-D3	UPC Wi-Free	34dB	6	WPA2	Connect
3	54-FA-3E-36-B0-D3	HZN249335425	31dB	6	WPA2-PSK	Connect
4	D8-5D-E2-0A-92-47	HP-Print-47-Color LaserJet MFF	30dB	6	WPA2-PSK	Connect
5	00-26-42-3B-D5-B0	bha-36729	26dB	1	WPA/WPA2	Connect
6	D0-D4-12-D0-B2-88	gk-16956	25dB	1	WPA/WPA2	Connect
7	FC-75-16-78-08-50	ceconet	16dB	1	WPA/WPA2	Connect
8	C4-14-3C-38-47-A0	sapa	11dB	11	WPA2	Connect
9	C4-14-3C-38-47-A2	sapamobile	10dB	11	WPA2-PSK	Connect
10	C4-14-3C-38-47-A1	sapaguest	10dB	11	OFF	Connect
11	C4-14-3C-38-47-A3		10dB	11	WPA2-PSK	Connect
12	14-49-E0-70-16-19	UPC Wi-Free	3dB	6	WPA2	Connect
13	2C-59-E5-F1-8B-53	HP-Print-53-Officejet Pro 8600	2dB	11	WPA2-PSK	Connect

1.10. Entrer le mot de passe du WLAN

Quick Setup - Wireless Client

SSID:

MAC of AP: Example:00-1D-0F-11-22-33

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

WDS Mode:

(Please choose Main AP's type of encryption, and input the wireless password)


Security Options:

WEP Key Index:

Authentication Type:

PassWord:

1.11. Redémarrer pour finaliser

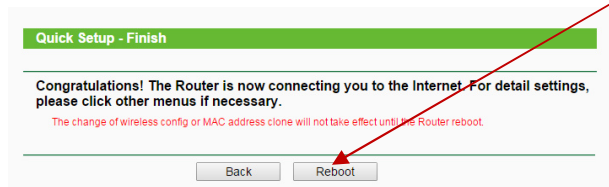

1.12. Se connecter avec le PC au bon WLAN



1.13. Raccorder le câble réseau Lan

1.14. Contrôler la connexion

Dans le menu du projecteur-> Réseau-> Infos réseau LAN câblé