

# EL-41SY 4 in, 1 out v1.3 HDMI Switcher

# **OPERATION MANUAL**





# Table of Contents

1.		Introduction	1
2.		Features	1
3.		Package Contents	1
4.		Operation Controls and Functions	
	4.1	Front Panel Diagram	2
	4.2	Rear Panel Diagram	3
5.		Remote Control	3
6.		Connection Diagram	4
7.		Specification	5



### 1. Introduction

The EL-41SY is a high performance HDMI switcher with IR control.

It allows you to connect up to four hdmi sources to a single hdmi input on a HDTV.

A simple remote control selects your required HDMI source for display on the HDTV.

### 2. Features

- v1.3 HDMI, HDCP 1.1 and DVI 1.0 compliant.
- Supports 'Deep Colour' (10/12/16 bit)
- Supports High Definition audio LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD master audio.
- Auto Signal Enhancement feature can improve signal quality after long distance transmission.
- LED indicators.
- Ideal for home theatre integration.
- Supports high resolution input:

PC: VGA, SVGA, XGA, SXGA, UXGA (1600 x 1200) & WUXGA (1920 x 1200). HDTV: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p and 1080p24fps

- Infra red control via supplied remote.
- Easy to install and simple to operate.


## 3. Package Contents

- EL-41SY
- 5V DC power supply adaptor.
- Operation Manual.



# 4. Operation Controls and Functions


### 4.1 Front Panel

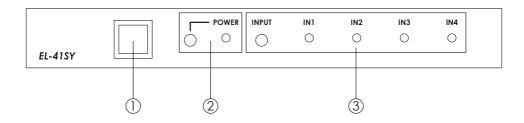

- Remote control sensor.
- 2. Power LED Indicator/ Power Button: The LED will illuminate when the power is turned on. Press the power button to switch the unit On/Off.
- 3. Input select Button/Indicators: Press the "INPUT" button repeatedly to cycle through the inputs to your required input source. The relevant LED will illuminate to indicate which input source has been selected.




# 4.2 Rear Panel



- 1. HDMI output: Connect the HDMI output of the unit to the HDMI input of your display using a HDMI cable.
- 2. HDMI inputs: Connect your various HDMI sources to the 4 HDMI inputs using HDMI cables.
- 3. Power: Plug the 5VDC power supply into the unit and connect the adaptor to an AC wall outlet.


### Remote Control



- 1. Power: Press to turn the unit On/Off
- 2. Direct input selector: Press 1, 2, 3 or 4 to select the required input source.
- 3. These buttons have no function for this model.



# 6. Connection Diagram

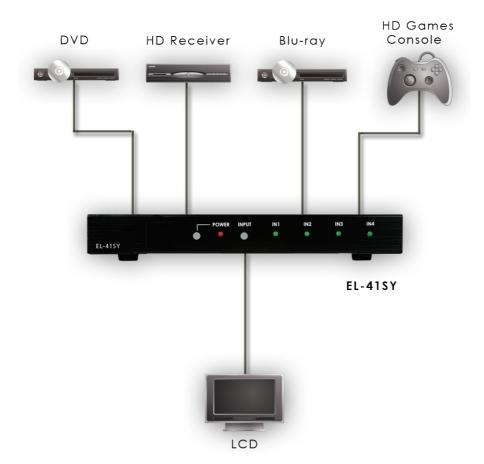



# 7. Specifications

Input Ports	4 x HDMI female ports	
HDCP Version	v1.1	
Output Port	1 x HDMI female port	
HDMI Specification	v1.3	
Frequency bandwidth	2.25Gbps	
Power Supply	5VDC/2.6A (US/EU standards, CE/FCC/UL Certified)	
Dimensions (mm)	200 (W) x 104 (D) x 25(H)	
Chassis Colour	Black	
Chassis Material	Aluminium	
Operating Temperature	Operating from 0°C ~ 48°C	
Gross Weight (g)	900	
Net. Weight (g)	600	



www.cypeurope.com